REFLECTIONS
TORUS FLANGED INDIRECT DOWNLIGHT

ELEMENT
by Tech Lighting®

LED 5 YEAR WARRANTY

Innovative, first-of-its-kind technology in architectural downlights, ELEMENT Reflections combines decorative recessed domes with beautifully controlled, reduced-glare indirect LED illumination. ELEMENT Reflections domes (available in 5", 8" and 12" diameters) are recessed into the ceiling plane and act as reflectors to a completely hidden ring of up-firing LEDs.

The Torus dome transforms beautiful three-dimensional geometry for dramatic visual interest with the subtle play of light and shadow. All ELEMENT Reflections domes also offer two ceiling appearance options: flanged for a more traditional ceiling appearance; or flangeless for a smooth, mudded-in ceiling appearance.

High quality LM80-tested LEDs
for consistent long-life performance and color

Pristine design and illumination:

- Reduced glare, indirect illumination (dimmable for enhanced mood-setting options)
- Three Aperture Options: 5", 8" and 12"
- Beveled, rounded trim edges smoothly and seamlessly integrate into ceiling

Housing and Trim/Dome sold separately.

SPECIFICATIONS

DELIVERED LUMENS	5": 684 8": 1175 12": 1925
WATTS	5": 9.2 8": 15.9 12": 31.8
VOLTAGE	Universal 120V-277V**
DIMMING	0-10V, ELV, TRIAC, ECOSYSTEM, HI-LUME 2-WIRE, DALI
LIGHT DISTRIBUTION	Lambertian
CCT	2700K, 3000K, 3500K, or Warm Color Dimming (3000K-1800K)
CRI	90+
CEILING APPEARANCE	Flanged (Trim accommodates a 1/2" to 1" ceiling thickness)
HOUSING	IC Airtight or Chicago Plenum
GENERAL LISTING	ETL, Title 24 (2700K, 3000K)
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 Years

*Visit ELEMENT-lighting.com for specific warranty limitations and details.

TORUS
shown in flanged

ORDERING INFORMATION

HOUSING	SIZE	HOUSING RATING	DIMMABLE DRIVER
EDIH	**5R** 5" DIAMETER **8R** 8" DIAMETER **12R** 12" DIAMETER	**I** IC AIRTIGHT **C** CHICAGO PLENUM	ELV/TRIAC/0-10V UNV* (LEAVE BLANK) **-ELD0** ELDOLED 0.1% 0-0V LINEAR UNV* **-ELD0A** ELDOLED 0.1% 0-0V LOGARITHMIC UNV* **-ELD1** ELDOLED 1% 0-0V LINEAR UNV* **-ELD1A** ELDOLED 1% 0-0V LOGARITHMIC UNV* **-ELDD** ELDOLED 0.1% DALI UNV* **-HLECO** HI-LUME ECO-SYSTEM FADE-TO-BLACK UNV* **-HL2W** HI-LUME 2-WIRE**

MUST ORDER LED TRIM/DOME SEPARATELY.
* UNV = 120V/277V INPUT VOLTAGE. ** HL2W 120V INPUT ONLY

TRIM/DOME	SIZE	CEILING APPEARANCE	CRI	CCT	DOME PATTERN	FINISH
EDIT	**5R** 5" DIAMETER **8R** 8" DIAMETER **12R** 12" DIAMETER	**F** FLANGED	**9** 90 CR	**27** 2700K **30** 3000K **35** 3500K **WD** 3000K-1800K WARM COLOR DIMMING	**2** TORUS	**W** WHITE

REFLECTIONS
TORUS FLANGED INDIRECT DOWNLIGHT



Torus 5"



Torus 8"



Torus 12"



Aperture 5"



Aperture 8"

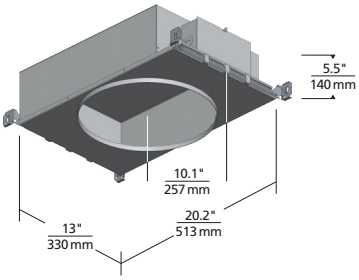

Aperture 12"

PHOTOMETRICS*

*For latest photometrics, please visit www.ELEMENT-Lighting.com

TORUS FLANGED 5"

Total Lumen Output:	684
Total Power:	9.2
Luminaire Efficacy:	74.1
Color Temp:	3000K
CRI:	90+

TORUS FLANGED 8"

Total Lumen Output:	1175
Total Power:	15.9
Luminaire Efficacy:	73.9
Color Temp:	3000K
CRI:	90+

TORUS FLANGED 12"

Total Lumen Output:	1925
Total Power:	31.8
Luminaire Efficacy:	60.6
Color Temp:	3000K
CRI:	90+

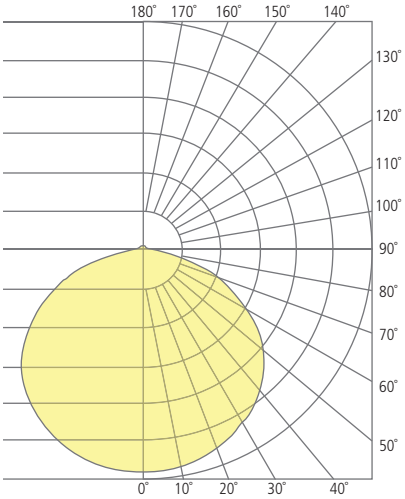

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

ELEMENT
by Tech Lighting®

GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500

© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C.
Tech Lighting reserves the right to change specifications for product improvements without notification.