


ENTRA™ 3" LED

ADJUSTABLE DOWNLIGHT & WALL WASH

The ENTRA 3" Adjustable Downlight presents a cost-effective alternative for delivering architectural-grade aesthetics and quality, meeting budget-sensitive residential and commercial specifications. Custom-engineered for high performance and reliability, ENTRA 3" offers a complete feature set providing flexibility without overwhelming options. The ENTRA 3" Adjustable Downlight offers LED options with Static White and Warm Dim.

- 2-step static white and warm dim
- Hot aiming (0–30° tilt + 359° rotation)
- Interchangeable optics: 20°, 40°, 65° (all included)
- Flanged/flangeless die-cast Bevel and Flat trims
- Available in IC Airtight, Chicago Plenum, and Fire-Rated



SHOWN IN FLANGELESS BEVEL SQUARE

LUMEN/CBCP MULTIPLIERS

CCT	90 CRI MULTIPLIER
2200K	0.60
2400K	0.83
2700K	0.92
3000K	1.00
3500K	1.03
4000K	1.07

Lumen output will vary by CCT and CRI.
See photometric charts for output information.

SPECIFICATIONS

	STATIC WHITE		WARM DIM	
	HIGH OUTPUT	LOW OUTPUT	HIGH OUTPUT	LOW OUTPUT
DELIVERED LUMENS	1165	856	981	721
WATTS	15	11	15	11
EFFICACY	78	78	66	66
CRI	90			
CBCP	20° - 4,213 40° - 2,327 65° - 1,244			
CCT	2200K, 2400K, 2700K, 3000K, 3500K, or 4000K		3000K-1800K	
COLOR CONSISTENCY	2-step			
VOLTAGE	Universal 120V or 277V			
DIMMING¹	Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%			
POWER SUPPLY	Constant current driver with +.9 power factor and >87% efficiency			
OPTICS	20°, 40°, 65° (all included); accepts 2 optical media			
ADJUSTABILITY	0-30° tilt, 359° rotation			
CEILING APPEARANCE	Flanged or flangeless			
CEILING THICKNESS	Flanged or flangeless: 1/2" to 1.5"			
CEILING APERTURE	4" ceiling cutout			
HOUSING	Fire-Rated, IC Airtight, Chicago Plenum. IC suitable up to R60 spray foam insulation.			
CONSTRUCTION	Housing: Heavy-gauge, cold-rolled steel Trim: Die-cast aluminum			
FINISH	Housing: Black powder coat Trim: Black or White (paintable)			
GENERAL LISTINGS	ETL listed, Damp Location. Shower version Wet Listed.			
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019).			
L70	50,000 hours min			
WARRANTY²	5 years			

Data in chart reflect 3000K/90 CRI values unless noted.

Ordering grids available on page 2.

Accepts two optical controls and an optional trim-mounted lens.

¹See visualcomfort.com for dimmer compatibility.

²Visit visualcomfort.com for specific warranty limitations and details.



© 2026 Visual Comfort of America, LLC. All rights reserved. Visual Comfort & Co. is a registered trademark.
Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

UPDATED 1/9/26

ENTRA™ 3" LED

ADJUSTABLE DOWNLIGHT & WALL WASH

ORDERING GRIDS

HOUSING

PRODUCT	LAMP	CRI	CCT	BEAM	FUNCTION	HOUSING RATING
EN3R ENTRA 3" ROUND	-LH HIGH OUTPUT	9 90 CRI	22 2200K, STATIC WHITE, 2-STEP	A 20° - 40° - 65° ²	A ADJUSTABLE ³	I IC AIRTIGHT
EN3S ENTRA 3" SQUARE	-LO LOW OUTPUT ¹		24 2400K, STATIC WHITE, 2-STEP			C CHICAGO PLENUM
			27 2700K, STATIC WHITE, 2-STEP			F FIRE-RATED, IC AIRTIGHT ⁴
			30 3000K, STATIC WHITE, 2-STEP			
			35 3500K, STATIC WHITE, 2-STEP			
			40 4000K, STATIC WHITE, 2-STEP			
			WD WARM DIM (3000K-1800K), 2-STEP			
	-	9		A	A	

Includes an LED driver with universal input 120V-277V, dimmable by reverse-phase, forward-phase, TRIAC, or 0-10V controls. 277V is only compatible with 0-10V dimming.

Housing ships with die-cast plaster plate for use on Flangeless installation. Do not use plate for flanged installs.

Trims are required and must be ordered separately.

¹LO - Sauna/steam-room use available only with combination of low output housing (-LO) and shower trim (-H or -S).

²A - LED module ships with 40° optic installed. Includes 20° and 65° optics as well.

³A - Use with 40° optic and adjust to 30° tilt for wall wash.

⁴F - Certified to ASTM E119, UL 263, and CAN/ULC-S101. Fire Rating of 1 and 2 hours, respectively. Fire-Rated is available in LH high output only.

TRIM

PRODUCT	CEILING APPEARANCE	STYLE	APERTURE	FINISH
EN3R ENTRA 3" ROUND	L FLANGELESS	B BEVEL	-O NO LENS	B BLACK ¹
EN3S ENTRA 3" SQUARE	L15 FLANGELESS 1"-1.5" CEILING THICKNESS ^{1,2}	F FLAT	-H SHOWER (SANDBLASTED LENS) ^{1,3}	W WHITE (PAINTABLE)
	F FLANGED 0.5"-0.75" CEILING THICKNESS	W WALL WASH ²	-S SHOWER (SOLITE LENS) ³	
	F1 FLANGED 0.75"-1" CEILING THICKNESS		-W WALL WASH (LENSED) ²	
	F15 FLANGED 1"-1.5" CEILING THICKNESS ^{1,2}			
			-	

¹H - Sandblasted shower lens not available with thicker ceiling trims (L15 and F15). Not available with black trim (B).

²W - Wall wash style trim can only be used with wall wash lensed aperture (-W). Wall wash not available with thicker ceiling trims (L15 and F15) as standard.

Available through quotes as custom.

³H, S - Shower (Sandblasted or Solite) lens aperture requires bevel trim (B). Sauna/steam-room use available only with combination of low output housing (-LO) and shower trim (-H or -S). Shower lens includes a gasket.

REFLECTOR TRIMS

PRODUCT	
EN3TREFNS1	ROUND, BEVEL, FIXED
EN3TREFNS1	ROUND, FLAT, FIXED
EN3TREFNS2	SQUARE, BEVEL, FIXED
EN3TREFNS2	SQUARE, FLAT, FIXED
EN3TREFS1	ROUND, BEVEL, ADJUSTABLE
EN3TREFS2	ROUND, FLAT, ADJUSTABLE
EN3TREFS1	SQUARE, BEVEL, ADJUSTABLE

Square, flat, adjustable is not available.

Not for use with sloped ceilings.

LENSES/LOUVERS¹

PRODUCT	
140MR16SF	SOLITE SOFT FOCUS LENS
140MR16SB	SANDBLASTED LENS
140MR16LL	LINEAR SPREAD LENS
140MR16DF	DIFFUSER SPREAD LENS
140MR16GL	CLEAR GLASS LENS
700A02-BK	EGGCRATE/HEXCELL LOUVER

¹For additional lenses, louvers, optical controls and accessories, reference visualcomfort.com. Lens/ louvers mounted to lamp assembly only (max 2).

LENS KIT

PRODUCT	CEILING APPEARANCE	STYLE	APERTURE
240EN3R	ENTRA 3" ROUND KIT	L FLANGELESS	B BEVEL ¹
240EN3S	ENTRA 3" SQUARE KIT	F FLANGED	F FLAT
			S

Lens kits can be used to convert open trims (No Lens) to Shower (Solite Lens) trims in the field.


¹B - For the Round Bevel Flangeless kit, order the 'F - Flanged' kit, as it works for both Flanged and Flangeless trims.

ENTRA™ 3" LED


ADJUSTABLE DOWNLIGHT & WALL WASH

TRIMS


FLANGED




ROUND BEVEL




SQUARE BEVEL




ROUND FLAT



SQUARE FLAT




ROUND WALL WASH




SQUARE WALL WASH


FLANGELESS




ROUND BEVEL




SQUARE BEVEL




ROUND FLAT



SQUARE FLAT



ROUND WALL WASH



SQUARE WALL WASH

FINISH




BLACK



WHITE
(PAINTABLE)


HOUSING

HIGH OUTPUT

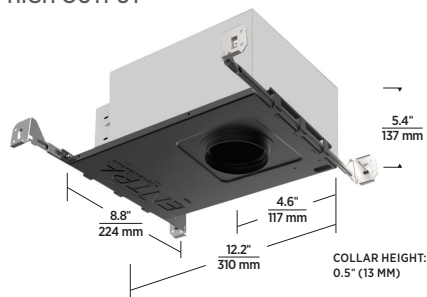

IC AIRTIGHT/FIRE-RATED
CHICAGO PLENUM


LOW OUTPUT

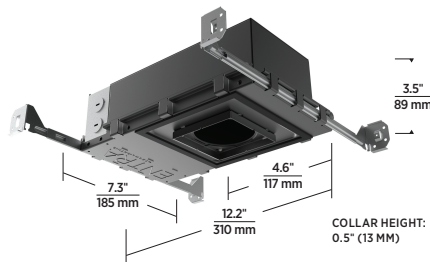


IC AIRTIGHT/
CHICAGO PLENUM

PLASTER PLATES

DIE CAST



ROUND DIE CAST
(INCLUDED FOR FLANGELESS INSTALLATION)



SQUARE DIE CAST
(INCLUDED FOR FLANGELESS INSTALLATION)




ENTRA™ 3" LED

ADJUSTABLE DOWNLIGHT & WALL WASH


WALL WASH PERFORMANCE

2' FROM WALL

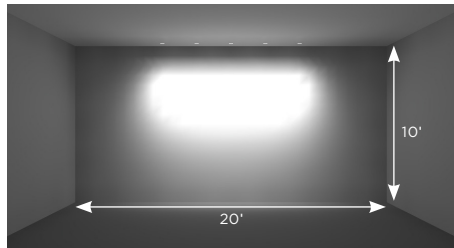


2' ON CENTER, 5 FIXTURES

2.5' FROM WALL

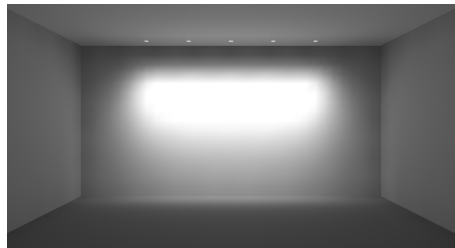

2.5' ON CENTER, 5 FIXTURES

3' FROM WALL

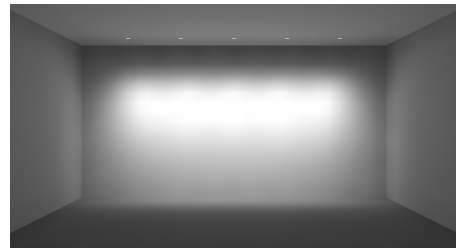

3' ON CENTER, 5 FIXTURES

FOOT-CANDLES ON WALL FROM MULTIPLE FIXTURES

HEIGHT ON WALL	2' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	0.4	0.8	0.4	0.5	0.8	0.5	0.5	0.6	0.5
9'	28.9	33.3	28.9	28.5	25.8	28.5	27.2	20.3	27.2
8'	63.1	71.6	63.1	63.5	54.1	63.5	61.0	38.1	61.0
7'	48.7	55.8	48.7	46.5	46.3	46.5	43.2	36.7	43.2
6'	29.9	32.7	29.9	27.7	28.5	27.7	25.3	24.6	25.3
5'	18.2	18.6	18.2	16.5	16.7	16.5	14.8	14.7	14.8
4'	10.9	10.7	10.9	10.0	9.9	10.0	9.0	9.0	9.0
3'	6.8	6.3	6.8	6.2	6.0	6.2	5.6	5.6	5.6
2'	4.5	3.9	4.5	4.1	3.8	4.1	3.7	3.6	3.7
1'	3.0	2.5	3.0	2.7	2.5	2.7	2.5	2.4	2.5

HEIGHT ON WALL	2.5' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
9'	10.3	12.9	10.3	9.4	11.5	9.4	8.5	11.0	8.5
8'	37.8	47.9	37.8	38.0	38.9	38.0	37.1	30.1	37.1
7'	45.0	54.0	45.0	42.6	45.8	42.6	39.9	37.2	39.9
6'	33.7	38.1	33.7	32.0	34.1	32.0	29.8	29.6	29.8
5'	23.0	24.2	23.0	21.5	22.2	21.5	19.7	19.9	19.7
4'	15.1	15.1	15.1	14.2	14.1	14.2	13.0	12.9	13.0
3'	9.8	9.4	9.8	9.2	9.0	9.2	8.5	8.4	8.5
2'	6.5	6.0	6.5	6.1	5.8	6.1	5.6	5.5	5.6
1'	4.5	4.0	4.5	4.2	3.9	4.2	3.9	3.7	3.9

HEIGHT ON WALL	3' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
9'	4.1	5.8	4.1	3.7	5.7	3.7	3.3	5.3	3.3
8'	21.2	27.6	21.2	20.5	23.6	20.5	19.4	19.1	19.4
7'	33.6	41.3	33.6	32.5	36.2	32.5	30.8	30.7	30.8
6'	33.0	38.1	33.0	31.6	34.7	31.6	29.6	30.6	29.6
5'	25.2	27.1	25.2	23.8	25.1	23.8	22.2	22.9	22.2
4'	18.1	18.3	18.1	17.0	17.2	17.0	15.9	16.0	15.9
3'	12.4	12.2	12.4	11.8	11.7	11.8	11.1	11.0	11.1
2'	8.6	8.2	8.6	8.1	7.9	8.1	7.6	7.5	7.6
1'	6.0	5.5	6.0	5.7	5.4	5.7	5.4	5.2	5.4

ENTRATM 3" LED
 ADJUSTABLE DOWNLIGHT & WALL WASH




PHOTOMETRICS

Description:	ENTRA 3" LED 20° Beam, 0° Tilt 90 CRI, 3000K High Output	Description:	ENTRA 3" LED 40° Beam, 0° Tilt 90 CRI, 3000K High Output	Description:	ENTRA 3" LED 65° Beam, 0° Tilt 90 CRI, 3000K High Output
Input Power (Watts):	14.7	Input Power (Watts):	14.7	Input Power (Watts):	14.7
Input Power Factor:	0.99	Input Power Factor:	0.99	Input Power Factor:	0.99
Absolute Luminous Flux (Lumens):	1081	Absolute Luminous Flux (Lumens):	1165	Absolute Luminous Flux (Lumens):	1142
Lumen Efficacy (Lumens per Watt):	73.5	Lumen Efficacy (Lumens per Watt):	79.3	Lumen Efficacy (Lumens per Watt):	77.7

ANGLE	0°	45°	90°
0°	4110	4110	4110
5°	3643	3217	3758
10°	2436	2229	2533
15°	1446	1393	1508
20°	845	817	846
25°	472	465	469
30°	242	253	252
35°	116	138	129
40°	59	77	64
45°	33	42	31
50°	19	23	17
55°	11	13	11
60°	6	7	6
65°	4	4	4
70°	3	3	3
75°	3	3	2
80°	2	2	1
85°	1	2	1
90°	1	1	1

ANGLE	0°	45°	90°
0°	2322	2322	2322
5°	2193	2232	2222
10°	1885	1940	1928
15°	1468	1497	1520
20°	1023	1038	1068
25°	648	664	675
30°	383	407	387
35°	218	244	210
40°	121	145	117
45°	66	83	62
50°	37	44	35
55°	21	24	20
60°	10	14	9
65°	4	7	3
70°	3	4	3
75°	2	2	2
80°	2	2	2
85°	1	1	1
90°	1	1	1

ANGLE	0°	45°	90°
0°	1237	1237	1237
5°	1220	1218	1212
10°	1146	1130	1120
15°	1025	1005	988
20°	872	849	833
25°	710	692	670
30°	543	534	507
35°	382	390	356
40°	246	262	239
45°	149	164	152
50°	85	96	92
55°	36	53	47
60°	12	26	18
65°	3	13	4
70°	3	4	3
75°	3	3	2
80°	2	2	2
85°	2	1	2
90°	2	1	1

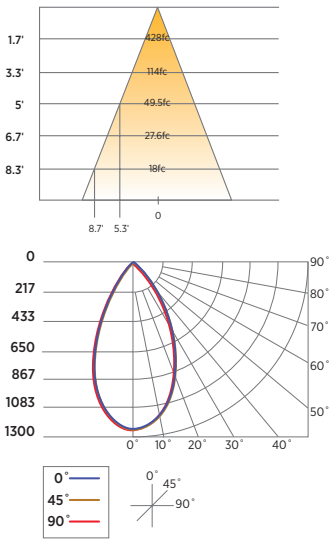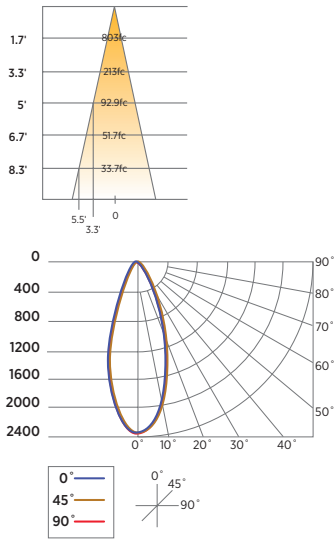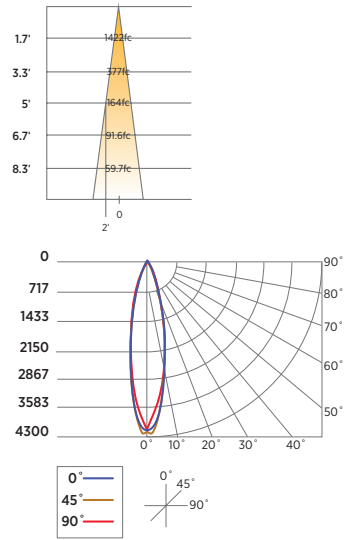

ENTRA™ 3" LED

ADJUSTABLE DOWNLIGHT & WALL WASH

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES