


ELEMENT™ 3" LED

WALL WASH

The ELEMENT 3" Wall Wash provides best-in-class performance for a smooth and consistent flood of illumination vertically and horizontally along the wall without scalloping or hot spots, eliminating shadowing. Engineered with high lumen output, ELEMENT Wall Wash downlights are a great solution for illuminating large vertical surface areas and highlighting multiple focal points, texture and design.

- Luminit turning film, two directions
- Even vertical and horizontal illumination of wall
- High efficacy: 77 lumens per watt
- Standard phase dimming down to 1%

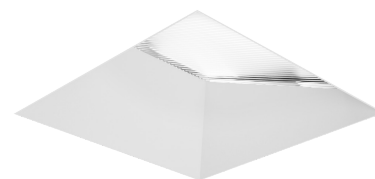

SHOWN IN FLANGED WALL WASH SQUARE

LUMEN/CBCP MULTIPLIERS

CCT	80 CRI MULTIPLIER	90 CRI MULTIPLIER
2200K	—	0.60
2400K	—	0.83
2700K	1.12	0.98
3000K	1.18	1.00
3500K	1.22	1.01

Lumen output will vary by CCT and CRI.
See photometric charts for output information.

SPECIFICATIONS

	STATIC WHITE				WARM DIM		TUNABLE WHITE	
	HIGH OUTPUT		LOW OUTPUT		HIGH OUTPUT	LOW OUTPUT	5000K-2700K (3000K)	4000K-1800K³ (3000K)
DELIVERED LUMENS	1518	1288	1166	989	1096	842	1050	1082
WATTS	116	16	12	12	16	12	15	15
EFFICACY	95	81	95	82	69	70	70	72
CRI	80+	90+	80+	90+	90+			
CCT	2200K, 2400K, 2700K, 3000K, or 3500K				3000K-1800K		5000K-2700K	4000K-1800K
COLOR CONSISTENCY	1-step (2-step for 2200K, 2400K)				2-step			
VOLTAGE	120V or 277V							
DIMMING¹	Standard reverse-phase, forward-phase, TRIAC and 0-10V dimming down to 1% eldoLED 0-10V or DALI-2 down to 0.1% Lutron Hi-lume EcoSystem down to 0.1%						eldoLED 0-10V or DALI-2 down to 0.1%	
POWER SUPPLY	Constant current driver with +.9 power factor and +80% efficiency							
OPTICS	Luminit Turning Film, 2 directions							
ADJUSTABILITY	Round housing has 360° rotation. Square housing has 90° rotation increments. 45° alignment for square collar.							
CEILING APPEARANCE	Flanged, flangeless or flangeless in wood ceiling							
CEILING THICKNESS	Flanged: Up to 2-1/2" (round flanged up to 1") Flangeless: No ceiling thickness limitations Flangeless in wood ceiling: 1/2" to 1-1/2"							
CEILING APERTURE	3-7/8" ceiling cutout							
HOUSING	IC Airtight, Chicago Plenum. IC suitable up to R60 spray foam insulation.							
CONSTRUCTION	Housing: Heavy-gauge, cold-rolled steel Trim: Die-cast aluminum							
FINISH	Housing: Black powder coat Trim: Antique Bronze, Black, Satin Nickel, or White (paintable)							
GENERAL LISTINGS	ETL Listed. Wet Listed.							
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019) (for 90 CRI versions).							
L70	50,000 hours min							
WARRANTY²	5 years							

Data in chart reflect 3000K/90 CRI values unless noted.

Custom output/custom RAL/custom CCT available, contact Quotes Department

Ordering grids available on page 2.

¹See visualcomfort.com for dimmer compatibility.

²Visit visualcomfort.com for specific warranty limitations and details.

³4000K - 1800K available as custom option only. Please consult Quotes Department.



© 2025 Visual Comfort of America, LLC. All rights reserved. Visual Comfort & Co. is a registered trademark.
Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

UPDATED 9/2/25

ELEMENT™ 3" LED

WALL WASH

ORDERING GRIDS

HOUSING

PRODUCT	CEILING APPEARANCE	FUNCTION	OUTPUT	HOUSING RATING	DRIVER
E3R ELEMENT 3" ROUND	L FLANGELESS	W WALL WASH	-LH HIGH OUTPUT, 16W	I IC AIRTIGHT	INTEGRATED DRIVERS 120V/277V UNIVERSAL PHASE/0-10V 1% (LEAVE BLANK) ² -ELD0 ELDOLED 0.1% 0-10V LINEAR -ELD0A ELDOLED 0.1% 0-10V LOGARITHMIC -ELDD ELDOLED 0.1% DALI-2 -ELTO ELDOLED TUNABLE WHITE 0.1% 0-10V LINEAR ^{3,4} -ELTD ELDOLED TUNABLE WHITE 0.1% DALI-2 ^{3,4} -HLECO LUTRON HI-LUME 0.1% ECOSYSTEM
E3S ELEMENT 3" SQUARE	F FLANGED		-LO LOW OUTPUT, 12W	C CHICAGO PLENUM	
	WC WOOD CEILING ¹				
		W	-		

Trims are required and must be ordered separately.
For dimming details, refer to dimmer compatibility chart.
¹WC - Wood ceiling option accommodates flangeless trims only.
²Universal dimming is reverse-phase, forward-phase, TRIAC and 0-10V. 277V is only compatible with 0-10V dimming.
³ELTO/ELTD - eldoLED tunable white drivers are not compatible with round flangeless (E3RL) or round wood ceiling (E3RWC) housings.
⁴ELTO/ELTD - Tunable white only available in high output, only available with ELTO (0-10V, linear), or ELTD (DALI-2). For 0-10V logarithmic dimming consult Quotes Department.

TRIM

PRODUCT	CEILING APPEARANCE	FUNCTION	LAMP	FINISH
E3R ELEMENT 3" ROUND	L FLANGELESS	W WALL WASH	-827 80 CRI, 2700K, 1-STEP	-Z ANTIQUE BRONZE
E3S ELEMENT 3" SQUARE	F FLANGED		-830 80 CRI, 3000K, 1-STEP	-B BLACK
	F15 FLANGED 1.1"-1.5" CEILING THICKNESS ¹		-835 80 CRI, 3500K, 1-STEP	-S SATIN NICKEL
	F20 FLANGED 1.6"-2.0" CEILING THICKNESS ¹		-922 90 CRI, 2200K, 2-STEP	-W WHITE
	F25 FLANGED 2.1"-2.5" CEILING THICKNESS ¹		-924 90 CRI, 2400K, 2-STEP	
			-927 90 CRI, 2700K, 1-STEP	
			-930 90 CRI, 3000K, 1-STEP	
			-935 90 CRI, 3500K, 1-STEP	
			-WD 90 CRI, 3000-1800K, WARM DIM, 2-STEP	
			-TW52 90 CRI, 5000K-2700K, TUNABLE WHITE, 2-STEP ²	
		W	-	-

¹F15/F20/F25 - Compatible with square wall wash trims only. Round wall wash flanged trims accommodate up to 1" max ceiling thickness.
²TW52 - Tunable white only available in high output, only available with ELTO (0-10V, linear), or ELTD (DALI-2). For 0-10V logarithmic dimming or for 4000K - 1800K option, consult Quotes Department.

PLASTER PLATES


PRODUCT	
150E3RPPLT-2	3" PLASTER PLATE ROUND DIE-CAST METAL ¹
150E3SPPLT-2	3" PLASTER PLATE SQUARE DIE-CAST METAL ¹
150E3RTPPLT-W	3" PLASTER PLATE ROUND SHEET METAL ²
150E3STPPLT-W	3" PLASTER PLATE SQUARE SHEET METAL ²

Plaster plates are used to convert flanged housings into flangeless housings.
¹Ships standard with flangeless housings. Round not compatible with Lutron Hi-lume or eldoLED drivers.
²Optional, thinner, meshed sheet-metal mud plates available for minimized plaster feathering to meet installer preference. Round not compatible with Lutron Hi-lume or eldoLED drivers. Square not compatible with eldoLED drivers.


ELEMENT™ 3" LED
WALL WASH

TRIMS

FLANGED




ROUND WALL WASH




SQUARE WALL WASH

FLANGELESS



ROUND WALL WASH



SQUARE WALL WASH

FINISH



ANTIQUE
BRONZE



BLACK



SATIN
NICKEL




WHITE
(PAINTABLE)

FLANGELESS IN WOOD CEILING




SHOWN IN ANTIQUE BRONZE




See installation instruction sheet on visualcomfort.com.

WARM DIM CURVE

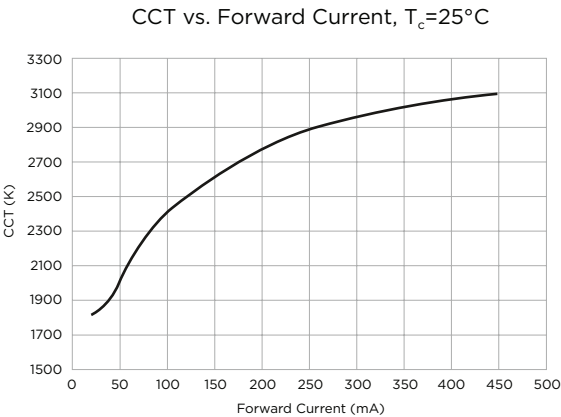

HOUSING

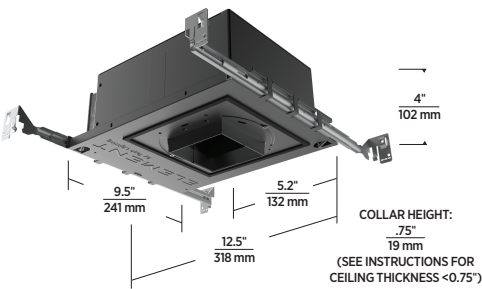

IC AIRTIGHT / CHICAGO PLENUM



ELEMENT™ 3" LED

WALL WASH


The ELEMENT 3" Wall Wash provide a best-in-class solution for a smooth and consistent flood of light vertically and horizontally to illuminate a large surface area and highlight multiple focal points, texture and design without compromise. Refer to the charts and visuals below for performance guidance to help determine fixture space and ensure your lighting design meets your needs.

PERFORMANCE

- Delivered Lumens: 1,288
- High Efficacy: 81 Lumens per Watt
- Reduced shadowing near ceiling
- Low ratio between highest and lowest foot-candles prevents hot spots

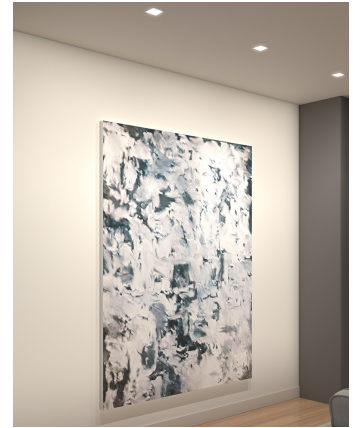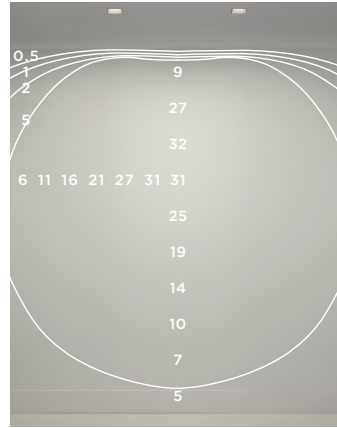

2.5' FROM WALL

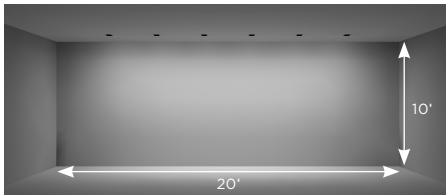

2.5' ON CENTER, 6 FIXTURES



3' ON CENTER, 6 FIXTURES




3.5' ON CENTER, 4 FIXTURES


3' FROM WALL



2.5' ON CENTER, 6 FIXTURES

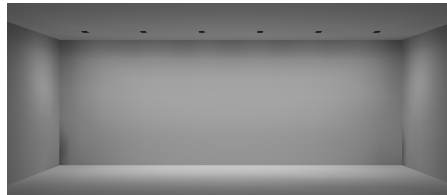


3' ON CENTER, 6 FIXTURES

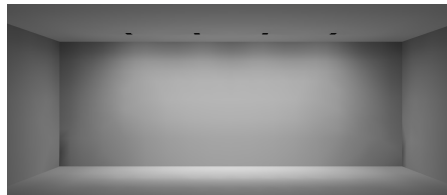

3.5' ON CENTER, 4 FIXTURES

3.5' FROM WALL

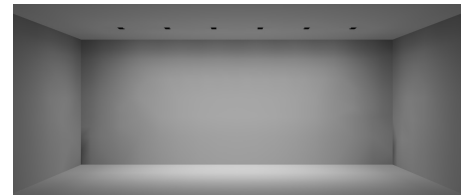

2.5' ON CENTER, 6 FIXTURES



3' ON CENTER, 6 FIXTURES



3.5' ON CENTER, 4 FIXTURES

FOOT-CANDLES ON WALL FROM MULTIPLE FIXTURES

HEIGHT ON WALL	2.5' FROM WALL								
	2.5' on center			3' on center			3.5' on center		
10'	3.2	4.2	3.2	3.0	3.4	3.0	2.9	2.6	2.9
9'	12.4	16.0	12.4	11.4	13.0	11.4	10.9	10.2	10.9
8'	26.5	32.0	26.5	24.3	27.6	24.3	22.8	23.3	22.8
7'	28.3	31.8	28.3	25.6	29.4	25.6	23.7	26.6	23.7
6'	24.7	26.4	24.7	22.4	24.8	22.4	20.6	23.1	20.6
5'	18.7	19.8	18.7	17.3	18.8	17.3	15.9	17.7	15.9
4'	13.4	14.2	13.4	12.6	13.6	12.6	11.7	12.9	11.7
3'	9.6	10.1	9.6	9.1	9.8	9.1	8.5	9.4	8.5
2'	6.9	7.3	6.9	6.6	7.1	6.6	6.3	6.9	6.3
1'	5.1	5.4	5.1	4.9	5.2	4.9	4.7	5.1	4.7

HEIGHT ON WALL	3' FROM WALL								
	2.5' on center			3' on center			3.5' on center		
10'	2.1	2.7	2.1	1.9	2.4	1.9	1.8	2.0	1.8
9'	7.1	10.1	7.1	6.4	8.8	6.4	6.0	7.4	6.0
8'	19.1	23.1	19.1	17.4	20.6	17.4	16.3	17.9	16.3
7'	21.1	24.6	21.1	19.1	22.9	19.1	17.5	21.1	17.5
6'	20.9	22.0	20.9	19.2	20.9	19.2	17.6	19.7	17.6
5'	17.5	18.2	17.5	16.3	17.3	16.3	15.1	16.5	15.1
4'	13.6	14.2	13.6	12.8	13.6	12.8	12.0	13.0	12.0
3'	10.2	10.7	10.2	9.7	10.3	9.7	9.2	9.9	9.2
2'	7.7	8.0	7.7	7.3	7.8	7.3	7.0	7.5	7.0
1'	5.8	6.0	5.8	5.6	5.9	5.6	5.3	5.7	5.3


HEIGHT ON WALL	3.5' FROM WALL								
	2.5' on center			3' on center			3.5' on center		
10'	1.5	1.8	1.5	1.3	1.7	1.3	1.2	1.5	1.2
9'	4.8	6.6	4.8	4.3	6.1	4.3	3.9	5.4	3.9
8'	14.1	16.8	14.1	12.9	15.4	12.9	12.0	13.7	12.0
7'	16.3	19.1	16.3	14.9	18.0	14.9	13.7	16.7	13.7
6'	16.9	18.1	16.9	15.6	17.2	15.6	14.4	16.4	14.4
5'	15.4	16.0	15.4	14.5	15.2	14.5	13.5	14.6	13.5
4'	12.8	13.3	12.8	12.2	12.8	12.2	11.5	12.2	11.5
3'	10.2	10.6	10.2	9.8	10.3	9.8	9.3	9.9	9.3
2'	8.0	8.3	8.0	7.7	8.0	7.7	7.4	7.8	7.4
1'	6.2	6.4	6.2	6.0	6.3	6.0	5.8	6.1	5.8

ELEMENT™ 3" LED


WALL WASH

PLASTER PLATES

INCLUDED DIE-CAST

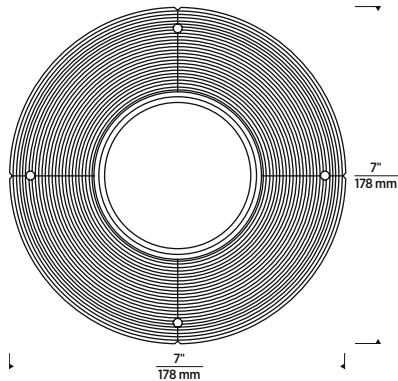


ROUND DIE-CAST (INCLUDED FOR FLANGELESS INSTALLATION)

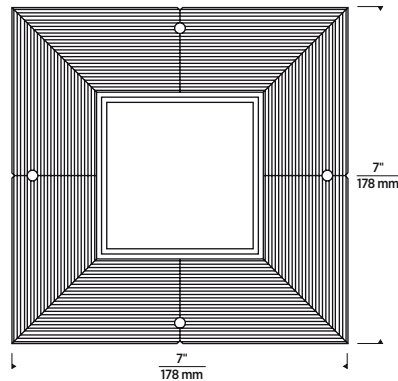


SQUARE DIE-CAST (INCLUDED FOR FLANGELESS INSTALLATION)

OPTIONAL SHEET METAL




ROUND SHEET METAL (OPTIONAL FOR FLANGELESS INSTALLATION)




SQUARE SHEET METAL (OPTIONAL FOR FLANGELESS INSTALLATION)

FLANGELESS IN WOOD CEILING TRIM ADAPTER

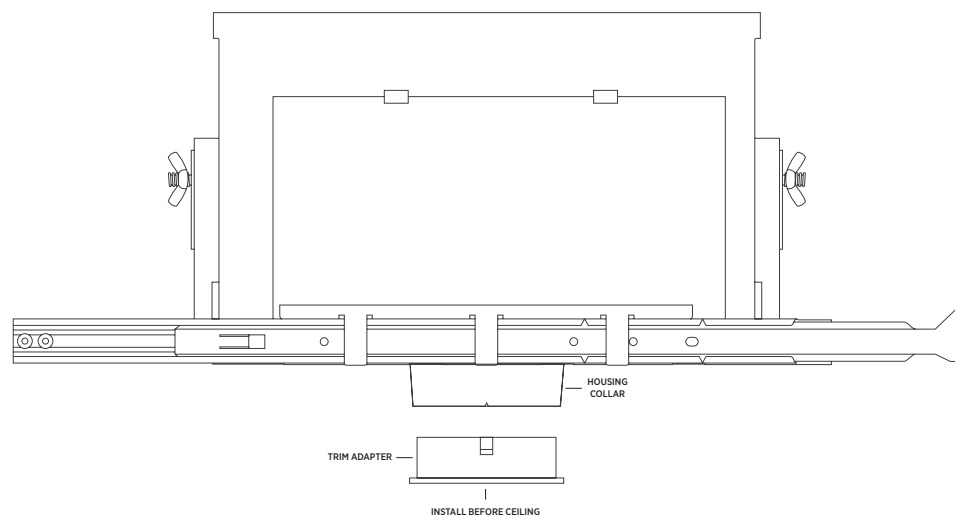

TRIM ADAPTER INSTALLED

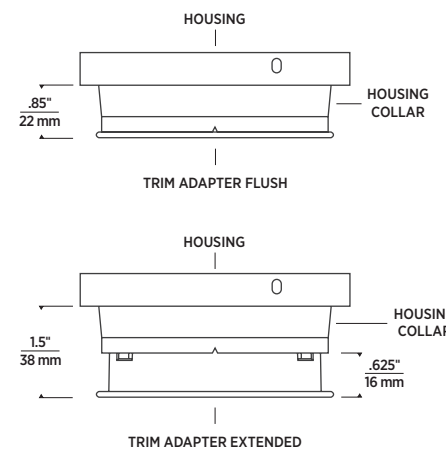

Wood ceiling housings ("WC" designation in the ordering grid) ship with an adjustable trim adapter that inserts into the housing aperture and allows standard ELEMENT 3" flangeless trims to achieve a truly flangeless, flush ceiling appearance in special applications such as wood or stone installation. For use in new construction. Consult installation instructions regarding plenum requirements and ceiling thickness ratios.

ELEMENT™ 3" LED

WALL WASH

PHOTOMETRICS

Description:3" LED Wall Wash
90 CRI, 3000K

Model:High Output

Input Power (Watts):15.1


Input Power Factor:0.98

Absolute Luminous
Flux (Lumens):1288

Lumen Efficacy
(Lumens per Watt):85

Output difference between CCTs - 5%, CRIs - 15%.

ANGLE	0°	45°	90°
0°	694	694	694
5°	740	758	710
10°	809	797	695
15°	844	805	671
20°	836	785	632
25°	776	740	568
30°	681	680	483
35°	566	607	390
40°	457	522	303
45°	354	429	234
50°	273	339	182
55°	230	259	143
60°	190	193	108
65°	154	141	79
70°	108	99	53
75°	56	63	32
80°	33	34	15
85°	15	14	7
90°	4	3	3

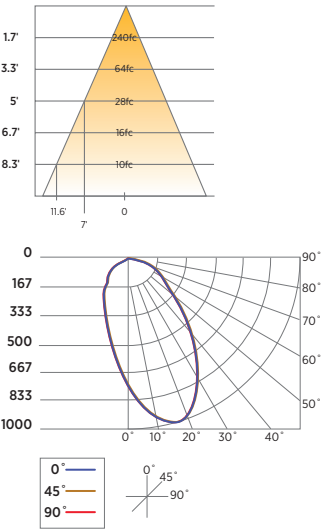

ELEMENT™ 3" LED

WALL WASH

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES