

ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER

The ENTRA 2" Adjustable Cylinder provides a cost-effective option with a modern aesthetic for residential, hospitality and commercial applications. Engineered with a 0–45° tilt, 360° rotation and interchangeable optics, ENTRA 2" Adjustable Cylinders are a great solution for flexible illumination and aiming light where it's needed. Mounting options include Flush Mount, Surface Mount, Pendant Mount and Conduit Mount. LED is recessed in the cylinder minimizing glare with warm dimming and static white options. Available in Black, Brushed Aluminum, and White (field paintable).

- Tool-free aiming/locking: 0–45° tilt, 360° rotation
- Interchangeable optics: 20°, 30°, 40°, and 60°
- 1-step for static white 2700K, 3000K, and 3500K; and 2-step for all other configurations
- Several lens and louver options including Solite Soft Focus



LUMEN/CBCP MULTIPLIERS

CCT	80 CRI MULTIPLIER	90 CRI MULTIPLIER
2200K	—	0.48
2400K	—	0.66
2700K	—	0.75
3000K	—	0.80
3500K	1.00	—

Lumen output will vary by CCT and CRI.
See photometric charts for output information.

SPECIFICATIONS

	STATIC WHITE		WARM DIM	
WATTAGE	Lumens	Efficacy	Lumens	Efficacy
8W	806	101	479	60
12W	1267	106	850	71
CRI	80+, 90+		90+	
CCT	2200K, 2400K, 2700K, 3000K, or 3500K		3000K-1800K	
COLOR CONSISTENCY	1-step (2-step for 2200K, 2400K)		2-step	
VOLTAGE	120V or 277V			
DIMMING¹	Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1% for 12W and 5% for 8W eLdoLED 0-10V or DALI-2 down to 0.1% Lutron Hi-lume EcoSystem down to 0.1%			
POWER SUPPLY	Constant current driver with +0.9 power factor and +80% efficiency			
BEAM SPREAD	Interchangeable optics: 20°, 30°, 40°, or 60°			
ADJUSTABILITY	0-45° tilt, 360° rotation			
CEILING APPEARANCE	Flush Mount Surface Mount (Canopy) Pendant Mount (Canopy) Conduit Mount (J-Box)			
CONSTRUCTION	Cylinder: Aluminum			
FINISH	Reflector: White, Black, or Brushed Aluminum Cylinder: White, Black, or Brushed Aluminum			
GENERAL LISTINGS	ETL Listed. Damp Location			
CALIFORNIA TITLE 24	Registered CEC appliance database. Complies with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019) (for 90 CRI versions).			
L70	50,000 hours min			
WARRANTY²	5 years			

Data in chart reflects 3500K/80 CRI values, unless otherwise noted.

Ordering grids available on page 2.

¹See visualcomfort.com for dimmer compatibility.

²Visit visualcomfort.com for specific warranty limitations and details.



© 2025 Visual Comfort of America, LLC. All rights reserved. Visual Comfort & Co. is a registered trademark.
Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

UPDATED 8/22/25

ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER

ORDERING GRIDS

CYLINDER

PRODUCT	MOUNTING	OUTPUT	CRI/CCT	BEAM SPREAD	FUNCTION	DRIVERS	REFLECTOR FINISH	CYLINDER FINISH
ENCY2R	ENTRA CYLINDERS 2" ROUND	-L08 8W	835 80 CRI, 3500K, 1-STEP	2 20°	A ADJUSTABLE	INTEGRATED DRIVERS 120V/277V	-B BLACK	B BLACK
	S SURFACE MOUNT (CANOPY)	-L12 12W	922 90 CRI, 2200K, 2-STEP	3 30°		-UNV UNIVERSAL PHASE/0-10V 1%/5% ⁴ (AVAILABLE FOR SURFACE AND PENDANT MOUNT)	-W WHITE	W WHITE
	C CONDUIT MOUNT (J-BOX) ²		924 90 CRI, 2400K, 2-STEP	4 40°			-A BRUSHED ALUMINUM	A BRUSHED ALUMINUM
	P PENDANT MOUNT (CANOPY) ³		927 90 CRI, 2700K, 1-STEP	6 60°				
			930 90 CRI, 3000K, 1-STEP					
			9WD 90 CRI, WARM DIM, 3000-1800K, 2-STEP			REMOTE DRIVERS 120V/277V⁵		
						-ELDO ELDOLED 0.1% 0-10V LINEAR		
						-ELDOA ELDOLED 0.1% 0-10V LOGARITHMIC		
						-ELDD ELDOLED 0.1% DALI-2		
						-UNV UNIVERSAL PHASE/0-10V 5% ⁴ (AVAILABLE FOR FLUSH MOUNT AND CONDUIT MOUNT)		
						-HLECO LUTRON HI-LUME 0.1% ECOSYSTEM		
ENCY2R		-			A	-	-	

For dimming details, refer to dimmer compatibility chart.

Standard Cylinder reflectors do not accommodate any lens accessories. To use with lens accessories (max. 2), order the **ENCY2LK Lens/Louver Kit**.

¹F - Flush Mount includes adapter plate to assemble to standard 4" square or octagonal junction box prior to ceiling install.

2C - Conduit Mount includes custom junction box assembled at/below the ceiling.

3P - Pendant Mount for use with ECPS Cylinders pendant stems

4. UNV - Universal dimming is reverse-phase, forward-phase, TRIAC, and 0-10V. 277V is only compatible with 0-10V dimming. The LED driver is housed within the junction box for Pendant and Surface Mount products and remotely for Flush and Conduit Mounted products. Dims down to 1% for 12W and 5% for 8W.

⁵Remote drivers ship in 4" x 8" x 1.8" black enclosure for remote location mounting

REPLACEMENT OPTICS

PRODUCT	BEAM SPREAD
353LEDGATOPT	20 20°
	30 30°
	40 40°
	60 60°
353LEDGATOPT	

REFLECTOR OPTIC TOOL

PRODUCT¹

ENCY2TR ENTRA CYLINDERS 2" REFLECTOR TOOL

ENCY2TR

LENS/LOUVER KIT

PRODUCT ¹	TYPE	REFLECTOR FINISH
ENCY2LK	SB SANDBLASTED LENS	-B BLACK
	SF SOLITE SOFT FOCUS LENS	-W WHITE
	LL LINEAR SPREAD LENS	-A BRUSHED ALUMINUM
	EC EGGRATE LOUVER	
ENCY2LK		-

¹It is highly recommended to order a reflector optic tool when purchasing lens/louver kits as this will make removal of the existing reflector significantly easier.

¹Required for use with lenses or louvers for Cylinders. Lens/louwer kits include a reflector and 1 lens. To add additional lenses (max. 2), see accessories page. It is highly recommended to order a reflector optic tool when purchasing lens/louwer kits as this will make removal of the existing reflector significantly easier.

PENDANT STEMS

PRODUCT ¹	LENGTH ²	FINISH
ECPS	12 12"	B BLACK
	24 24"	W WHITE
	36 36"	A BRUSHED ALUMINUM
	48 48"	
	60 60"	
	72 72"	

¹Required for Pendant Mount only.

²Consult Quotes Department for custom lengths to the inch.

VAULTED CEILING ADAPTER

PRODUCT		FINISH	
ECVA	PENDANT MOUNT ¹	B	BLACK
ECVAD	SURFACE MOUNT ²	W	WHITE
		A	BRUSHED ALUMINUM

¹For use with Pendant Mount. Adds 1.7" to the overall length of the stem. Accommodates slopes up to 45 degrees.

2For use with Surface Mount. Accommodates slopes up to 45 degrees.

ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER

CYLINDERS

FLUSH MOUNT




WHITE



BRUSHED ALUMINUM



BLACK



ADAPTER PLATES
MUST BE INSTALLED
PRIOR TO CEILING
INSTALLATION

CONDUIT MOUNT (J-BOX)




WHITE



BRUSHED ALUMINUM



BLACK



SURFACE MOUNT (CANOPY)





WHITE



BRUSHED ALUMINUM



BLACK



VAULTED CEILING ADAPTER

PENDANT MOUNT (CANOPY)





WHITE



BRUSHED ALUMINUM





BLACK



VAULTED CEILING ADAPTER

REMOTE DRIVER J-BOX



ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER







PHOTOMETRICS

Description:	2" Cylinder Adjustable 20° Beam, 0° Tilt, 90 CRI, 3000K	Description:	2" Cylinder Adjustable 30° Beam, 0° Tilt, 90 CRI, 3000K	Description:	2" Cylinder Adjustable 40° Beam, 0° Tilt, 80 CRI, 3500K
Input Power (Watts):	11.07	Input Power (Watts):	11.05	Input Power (Watts):	11.05
Input Power Factor:	0.99	Input Power Factor:	0.99	Input Power Factor:	0.99
Absolute Luminous Flux (Lumens):	907	Absolute Luminous Flux (Lumens):	979	Absolute Luminous Flux (Lumens):	1268
Lumen Efficacy (Lumens per Watt):	82	Lumen Efficacy (Lumens per Watt):	89	Lumen Efficacy (Lumens per Watt):	114
Output difference between CCTs - 5%, CRIs - 15%.					

ANGLE	0°	45°	90°
0°	2847	2847	2847
5°	2519	2528	2522
10°	1835	1842	1847
15°	1157	1194	1170
20°	716	739	735
25°	425	438	442
30°	205	216	216
35°	89	93	94
40°	55	57	56
45°	40	41	42
50°	30	30	30
55°	20	20	20
60°	16	17	17
65°	13	13	13
70°	9	8	8
75°	5	5	4
80°	1	1	1
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	2638	2638	2638
5°	2501	2498	2502
10°	2031	2035	2036
15°	1370	1389	1365
20°	821	842	816
25°	458	471	454
30°	237	245	227
35°	98	100	96
40°	52	53	52
45°	37	38	38
50°	25	25	25
55°	15	15	15
60°	12	12	12
65°	9	9	9
70°	6	6	6
75°	3	3	3
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	2331	2331	2331
5°	2244	2050	2248
10°	2031	2035	2017
15°	1685	1695	1685
20°	1262	1263	1257
25°	804	811	814
30°	426	435	431
35°	179	192	190
40°	88	90	92
45°	48	49	50
50°	28	29	30
55°	17	18	18
60°	13	13	14
65°	10	10	10
70°	6	6	6
75°	2	3	3
80°	0	0	0
85°	0	0	0
90°	0	0	0



ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER

PHOTOMETRICS

Description:2" Cylinder Adjustable
60° Beam, 0° Tilt,
90 CRI, 3000K

Input Power (Watts):11.08


Input Power Factor:0.99

Absolute Luminous
Flux (Lumens):1019

Lumen Efficacy
(Lumens per Watt):92

Output difference between CCTs - 5%, CRIs - 15%.

ANGLE	0°	45°	90°
0°	1115	1115	1115
5°	1090	1093	1096
10°	1021	1021	1028
15°	909	910	920
20°	776	782	788
25°	624	631	636
30°	464	468	471
35°	316	318	320
40°	202	198	200
45°	108	104	104
50°	62	60	58
55°	35	34	33
60°	20	20	19
65°	9	9	8
70°	6	6	6
75°	4	4	4
80°	2	2	2
85°	0	0	0
90°	0	0	0

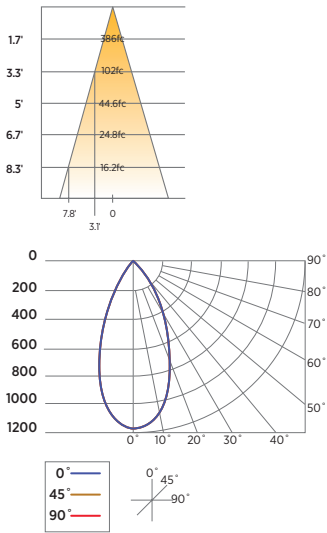

ENTRA™ 2" CYLINDER

ADJUSTABLE CYLINDER

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES