

VISUAL COMFORT & CO. TEST REPORT

SCOPE OF WORK

Electrical and Photometric tests as required to the IESNA test standard.

MODEL NUMBER

E4PSLRD-8307-W

REPORT NUMBER

104206403CHI-106D

ISSUE DATE

August 14, 2020

REVISION DATE

None

DOCUMENT CONTROL NUMBER

TBD

© 2017 INTERTEK



REPORT NO.: 104206403CHI-106D

REPORT DATE: August 14, 2020

TEST REPORT

TEST OF ONE E4PSL 75DEG 400MA

MODEL NO. E4PSLRD-8307-W
LED MODEL NO. BRIDGELUX BXRE-**E2000-C-83
DRIVER MODEL NO. ERP 255ESS020W400

RENDERED TO:

VISUAL COMFORT & CO.
7400 LINDER AVE.
SKOKIE IL 60077

STATEMENT OF LIMITATIONS

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01080748-1.

STANDARDS USED

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

DESCRIPTION OF SAMPLE

The client submitted one production sample of model number E4PSLRD-8307-W. The sample was received by Intertek on July 13, 2020 in undamaged condition and one sample was tested as received. The sample designation was AH07132020091733.

DATE OF TESTS

August 5, 2020.

REPORT NO.: 104206403CHI-106D

REPORT DATE: August 14, 2020

TEST REPORT

SUMMARY

| | |
|---------------------|-------------------|
| MODEL NO: | E4PSLRD-8307-W |
| DESCRIPTION: | E4PSL 75deg 400mA |

| CRITERIA | RESULTS |
|------------------------------------|---------|
| Lumen Output (lumens) | 1483.1 |
| Input Power (W) @ 120 (VAC) | 15.42 |
| Lumen Efficacy (lm/W) | 96.2 |
| Input Power Factor () @ 120 (VAC) | 0.989 |

EQUIPMENT LIST

| EQUIPMENT USED | MODEL NO. | CONTROL NO. | LAST CAL DATE | CAL DUE DATE |
|----------------------------------|-----------|-------------|---------------|--------------|
| Yokogawa Power Meter | WT210 | 146919 | 7/1/2020 | 7/1/2021 |
| Omega Thermometer | DPI8-C24 | 146920 | 10/3/2019 | 10/3/2020 |
| LSI High Speed Mirror Goniometer | 6440T | 146928 | VBV | VBV |
| Newport Thermohygrometer | iServer | 146957 | 12/2/2019 | 12/2/2020 |
| Pacific, AC Power Supply | 118-ACX | CHI0153 | VBV | VBV |

REPORT NO.: 104206403CHI-106D

REPORT DATE: August 14, 2020

TEST REPORT

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD

A Type C Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for the SSL sample.

Ambient temperature was measured equal to the height of the sample mounted on the goniometer equipment. The SSL sample was operated on the client provided driver at rated input volts in its designated orientation. The SSL sample was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

REPORT NO.: 104206403CHI-106D

REPORT DATE: August 14, 2020

TEST REPORT


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

| INTERTEK CONTROL NO. | BASE POSITION | INPUT VOLTAGE (VAC) | INPUT CURRENT (mA) | INPUT POWER (W) | INPUT POWER FACTOR () | LIGHT OUTPUT (lm) | LUMEN EFFICACY (lm/W) |
|----------------------|---------------|---------------------|--------------------|-----------------|------------------------|-------------------|-----------------------|
| AH07132020091733 | Base Up | 120.1 | 129.9 | 15.42 | 0.989 | 1483.1 | 96.2 |

INTENSITY SUMMARY - CANDELAS

| Angle | 0 | 22.5 | 45 | 67.5 | 90 |
|-------|-----|------|-----|------|-----|
| 0 | 932 | 932 | 932 | 932 | 932 |
| 5 | 934 | 932 | 931 | 929 | 929 |
| 10 | 930 | 927 | 925 | 924 | 923 |
| 15 | 908 | 904 | 904 | 900 | 899 |
| 20 | 864 | 858 | 859 | 854 | 850 |
| 25 | 785 | 776 | 782 | 774 | 769 |
| 30 | 680 | 665 | 674 | 664 | 657 |
| 35 | 544 | 533 | 550 | 535 | 522 |
| 40 | 405 | 402 | 428 | 403 | 390 |
| 45 | 294 | 293 | 316 | 295 | 281 |
| 50 | 212 | 213 | 228 | 214 | 202 |
| 55 | 149 | 150 | 160 | 150 | 144 |
| 60 | 98 | 98 | 105 | 99 | 94 |
| 65 | 61 | 60 | 64 | 60 | 58 |
| 70 | 36 | 33 | 35 | 34 | 33 |
| 75 | 19 | 17 | 17 | 17 | 16 |
| 80 | 10 | 9 | 8 | 9 | 9 |
| 85 | 5 | 4 | 4 | 4 | 4 |
| 90 | 0 | 0 | 0 | 0 | 0 |

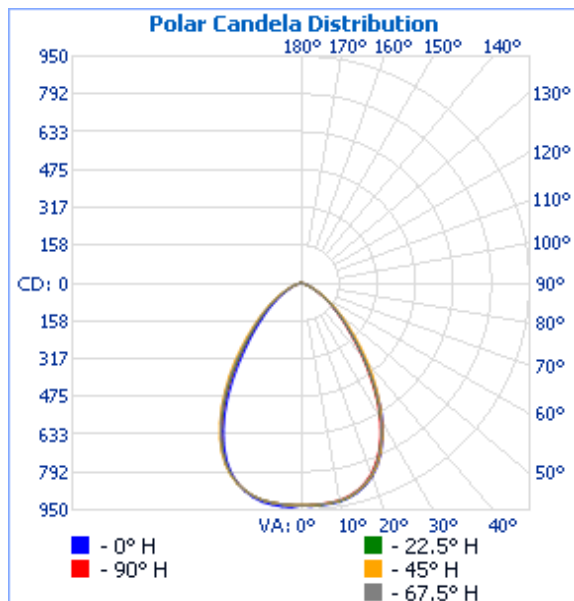

REPORT NO.: 104206403CHI-106D



REPORT DATE: August 14, 2020

TEST REPORT

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

| MOUNTING HEIGHT: 10ft | |
|-----------------------------|----------------------|
| ILLUMINANCE - CONE OF LIGHT | ISOILLUMINATION PLOT |

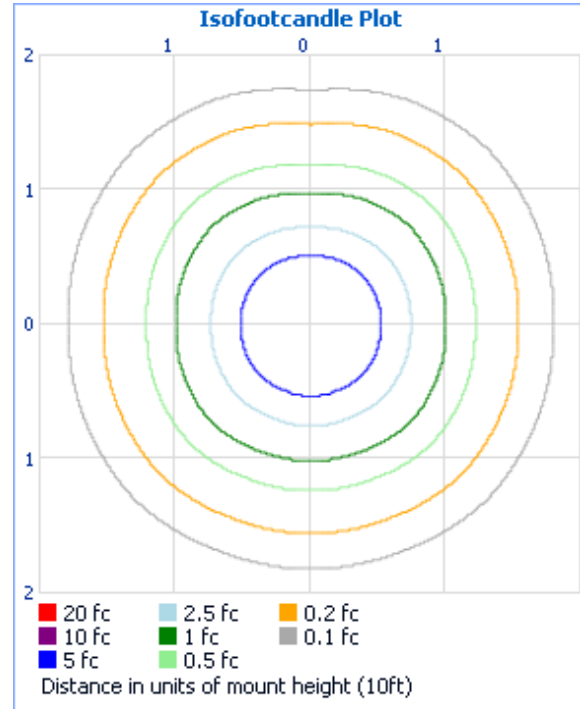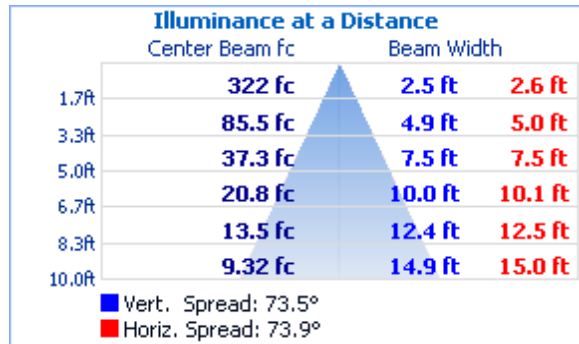

ZONAL LUMEN SUMMARY AND PERCENTAGES



| ZONE | LUMENS | % LUMINAIRE |
|--------|--------|-------------|
| 0-30 | 695.0 | 46.9 |
| 0-40 | 1027.9 | 69.3 |
| 0-60 | 1396.0 | 94.1 |
| 60-90 | 87.1 | 5.9 |
| 70-100 | 24.8 | 1.7 |
| 90-120 | 0.0 | 0.0 |
| 0-90 | 1483.1 | 100.0 |
| 90-180 | 0.0 | 0.0 |
| 0-180 | 1483.1 | 100.0 |

| ZONE | LUMENS | % LUMINAIRE |
|-------|--------|-------------|
| 0-10 | 88.6 | 6.0 |
| 10-20 | 253.1 | 17.1 |
| 20-30 | 353.3 | 23.8 |
| 30-40 | 332.8 | 22.4 |
| 40-50 | 231.6 | 15.6 |
| 50-60 | 136.5 | 9.2 |
| 60-70 | 62.3 | 4.2 |
| 70-80 | 20.1 | 1.4 |
| 80-90 | 4.7 | 0.3 |

REPORT NO.: 104206403CHI-106D
REPORT DATE: August 14, 2020

TEST REPORT

PICTURES

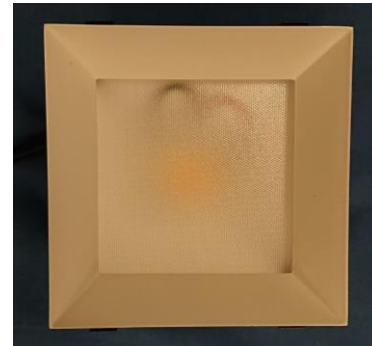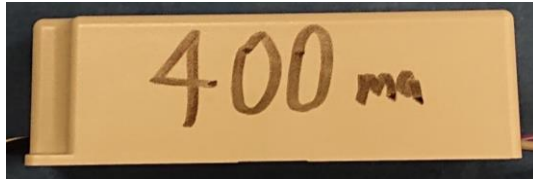

CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:

Ian Smith

Ian Smith
Engineer
Lighting Division

Report Reviewed By:

Jeffrey Davis

Jeff Davis
N.A. Technical Lead
Lighting Division

Attachments: IES File

REVISION HISTORY

| JOB NUMBER | DATE OF REVISION | PROJECT HANDLER | REVIEWED BY | REVISION NOTE |
|------------|------------------|-----------------|-------------|---------------|
| None | | | | |