

VISUAL COMFORT & Co.

Light efficiency:


82 Lumen/Watt

Output: 2234 lm

Peak: 4155 cd

Power: 27.4 W

PF: 0.99

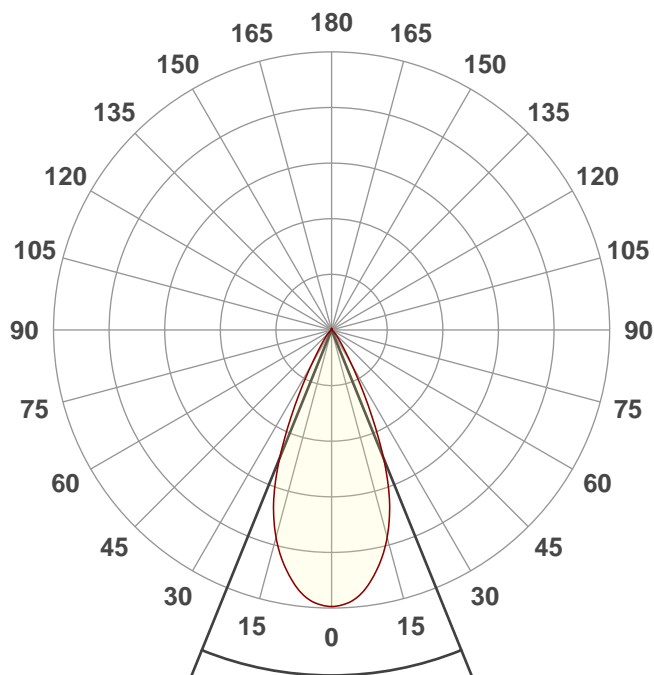

Product name:

TR1100 EC3RS-279WD314DN-UNV-W


Date and time:

3/24/2023 4:07:18 PM

Beam angle

44.1°

Power

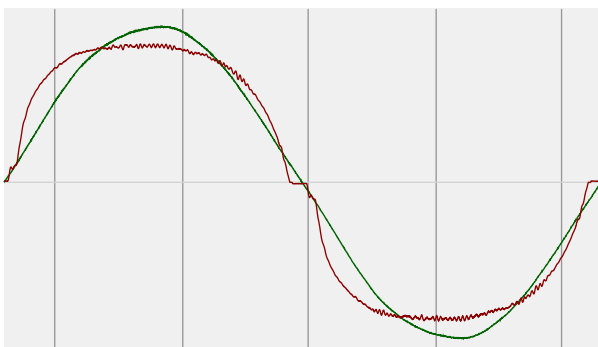


Voltage: 122 V

Current: 0.228 A

ISO Diagrams

ISO candela diagram

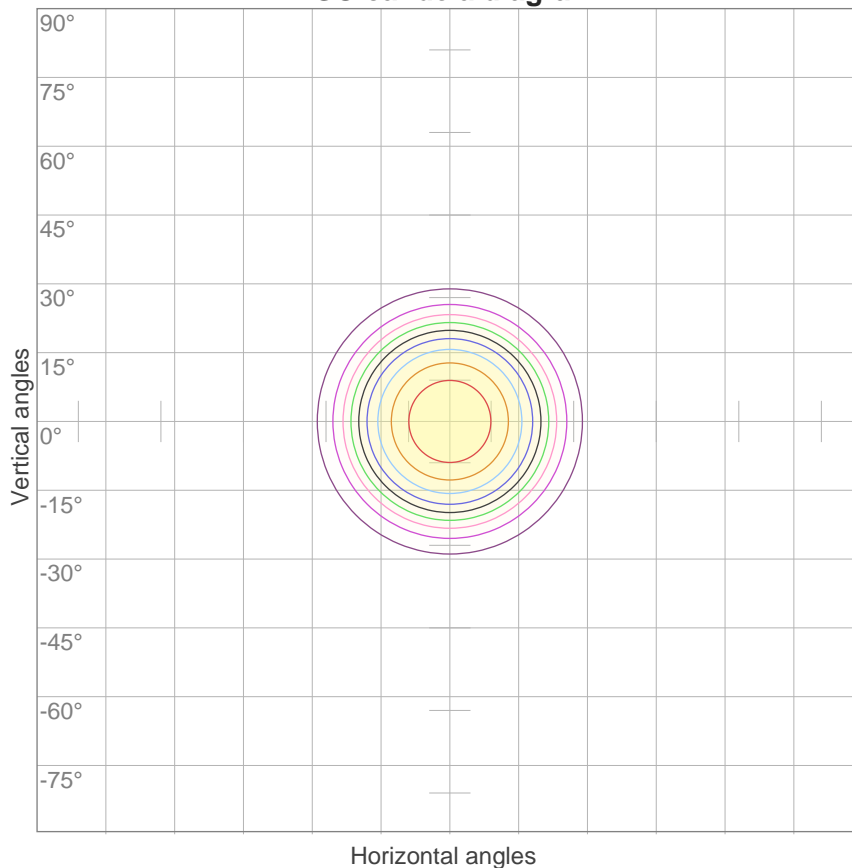


10%	415 cd
20%	831 cd
30%	1246 cd
40%	1662 cd
50%	2077 cd
60%	2493 cd
70%	2908 cd
80%	3324 cd
90%	3739 cd

Conditions:

Number of c-planes: 16

Candela at center: 4155 cd

ISO lux diagram

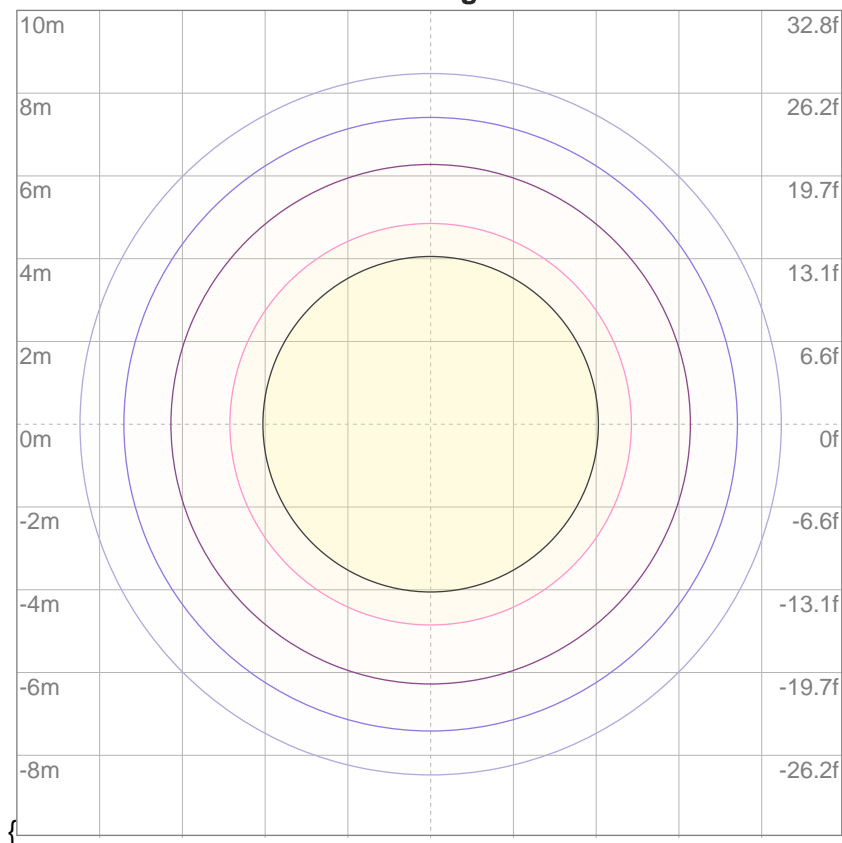

3%	125 lx
5%	208 lx
10%	415 lx
30%	1246 lx
50%	2077 lx

Conditions:

Number of c-planes: 16

Lux at center: 4155 lx

Lux distribution on a surface when lamp is mounted at 1 meter from the surface.

Mounting height: 1 Meters (3 Feet)