

Light efficiency:

95 Lumen/Watt

Light quality:

CRI: 91.1

Color temperature:

3027 K

Output: 1835 lm

Peak: 6454 cd

Power: 19.3 W

PF: 0.99

No photo

Tracking number: [n/a](#)

Product name:


TR0606\_L199304D\_18

Item number:

Date and time:


6/10/2021 3:36:31 PM

Description:

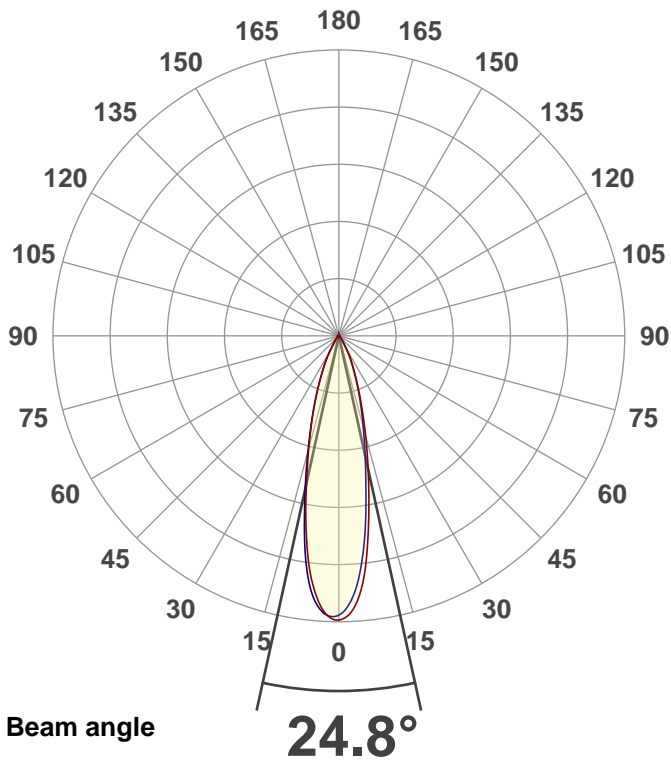




CIE 1931  
x: 0.436  
y: 0.405

Spectra

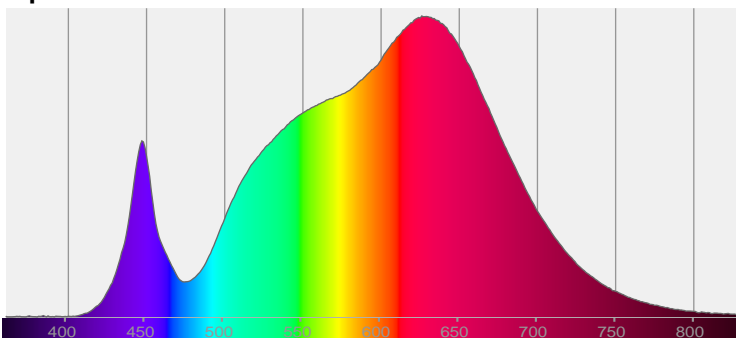


Power

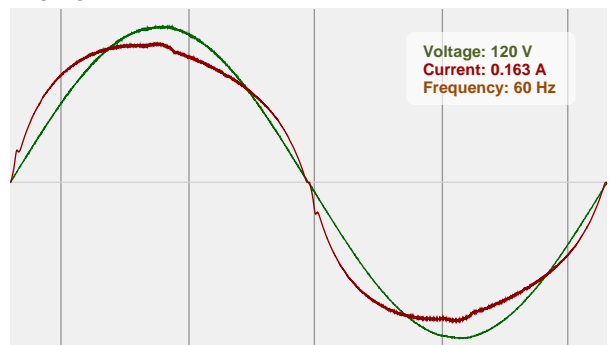


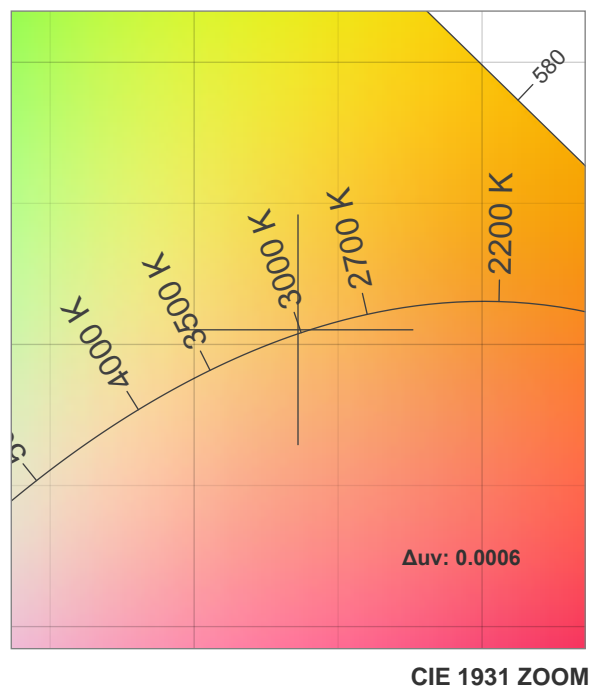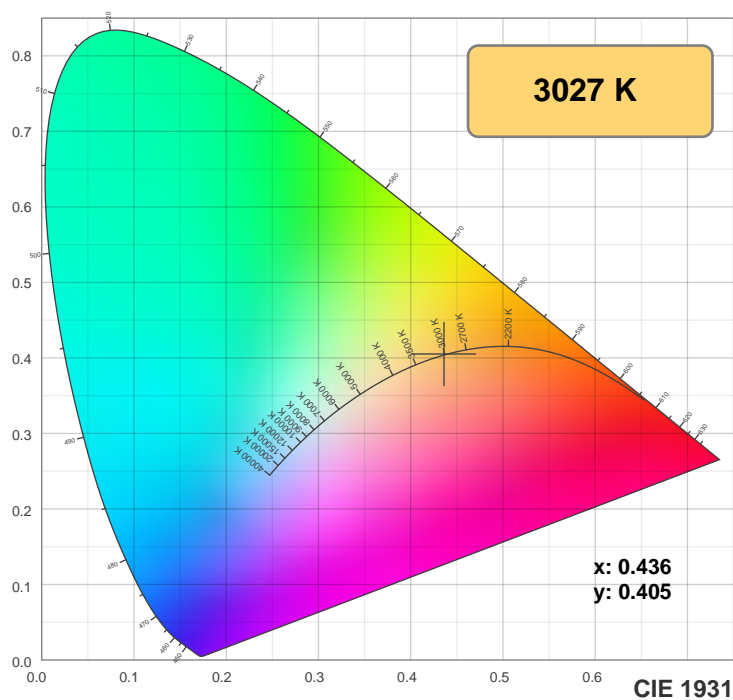

**TM30: 88.7**

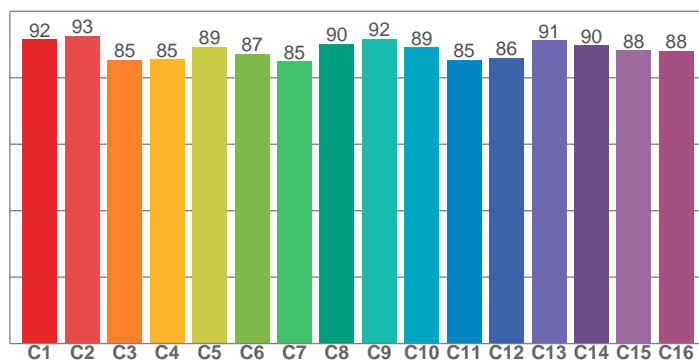

**CRI: 91.1 (R1-R8)**

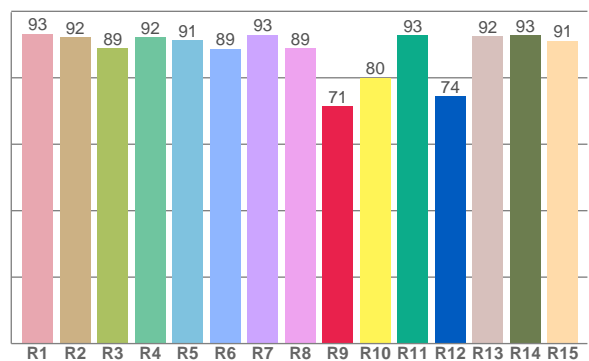

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.2	92.1	88.9	92.3	91.4	88.8	93.0	89.0	71.4	80.0	92.8	74.4	92.5	92.8	91.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.6	92.7	85.3	85.5	89.2	87.3	84.9	90.2	91.7	89.2	85.4	85.9	91.3	89.8	88.2	88.1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.6	96.7	84.0	86.7	87.4	83.6	84.8	92.2	94.5	89.7	91.1	92.7	93.9	89.6	88.6

**CQS: 88.7**

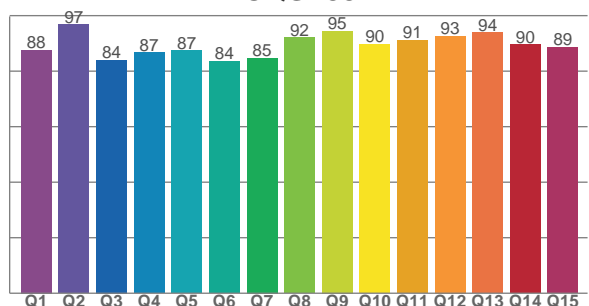

### Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3027 K	91.1	71.4	88.7	103.8	88.7	0.436	0.405	0.250	0.348	0.0006







**Rf 88.7**


Fidelity index Rf

**Rg 103.8**

Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	92	-3%	-3%
2	93	-3%	2%
3	85	0%	8%
4	85	4%	8%
5	89	7%	6%
6	87	8%	0%
7	85	5%	-8%
8	90	1%	-6%
9	92	-3%	-4%
10	89	-6%	1%
11	85	-3%	10%
12	86	4%	8%
13	91	6%	2%
14	90	8%	-3%
15	88	4%	-6%
16	88	2%	-9%

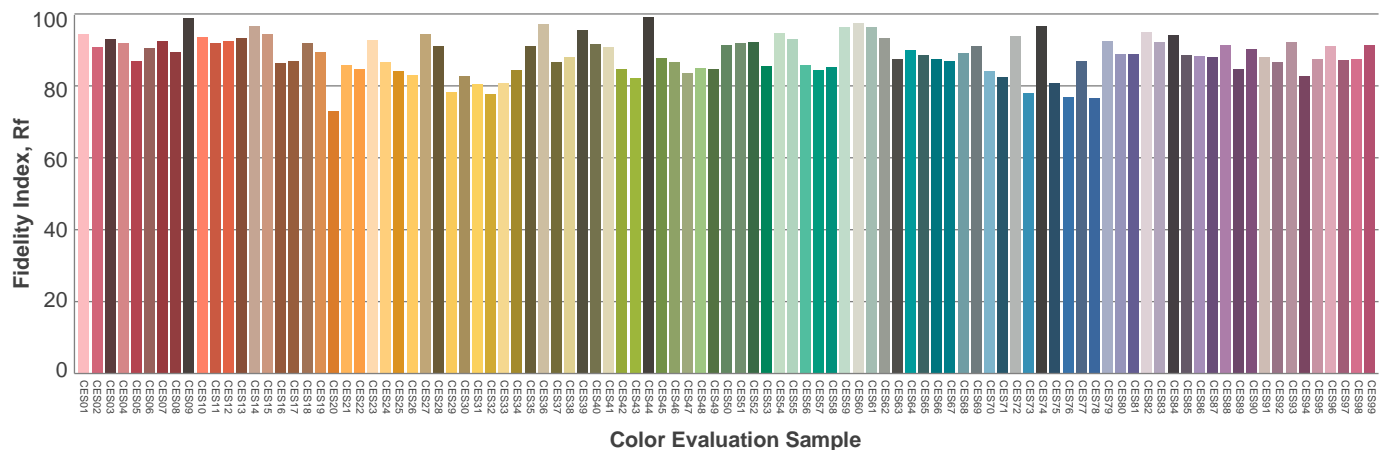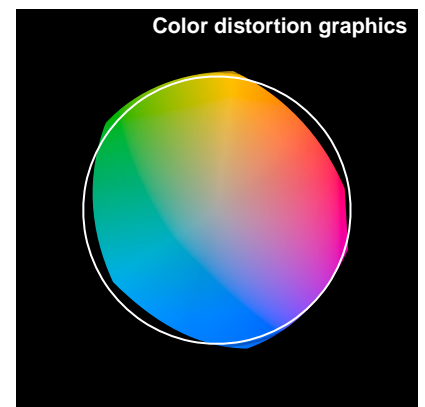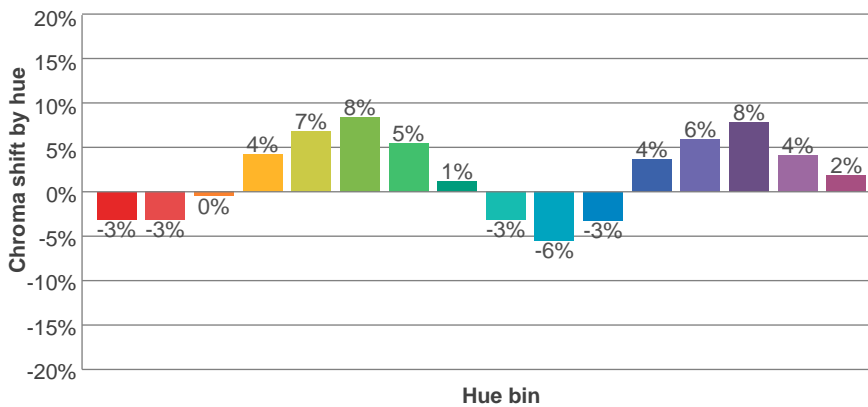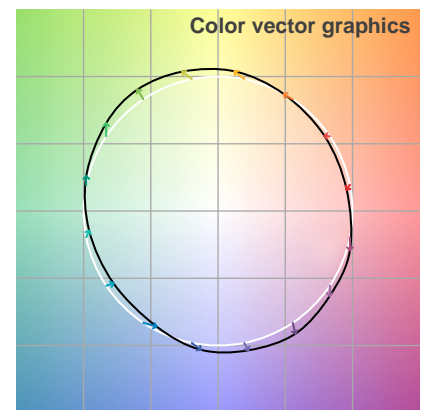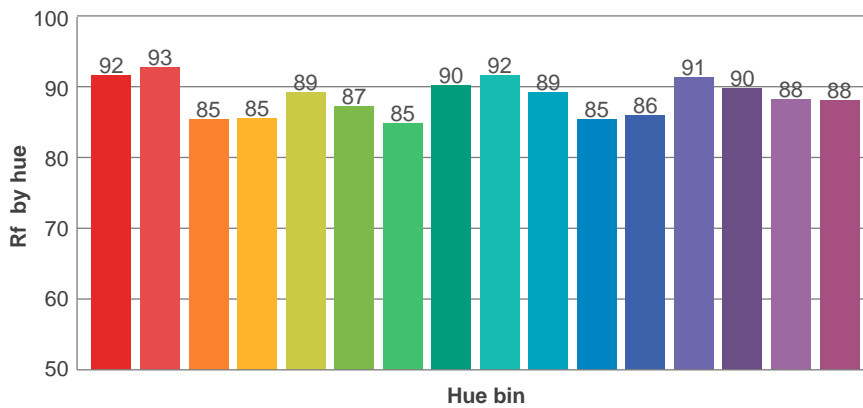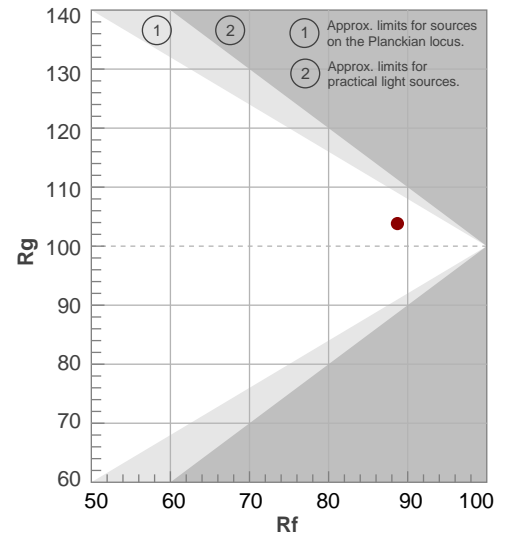

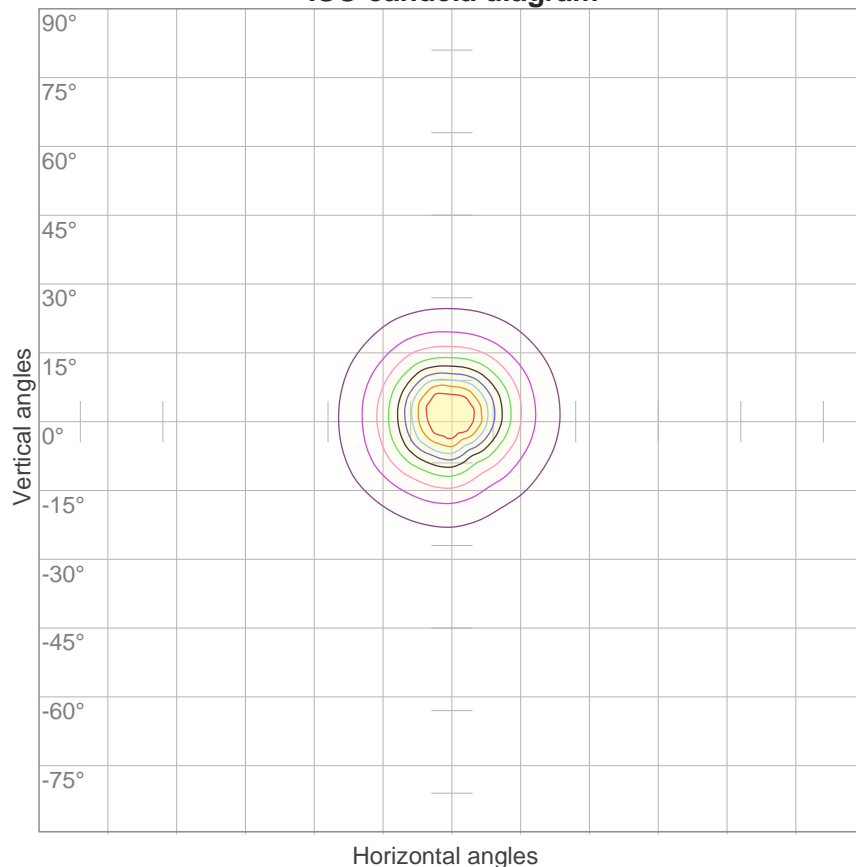
**ISO candela diagram**


10%	640 cd
20%	1280 cd
30%	1920 cd
40%	2560 cd
50%	3200 cd
60%	3840 cd
70%	4480 cd
80%	5120 cd
90%	5760 cd

**Conditions:**

Number of c-planes: 12

Candela at center: 6400 cd

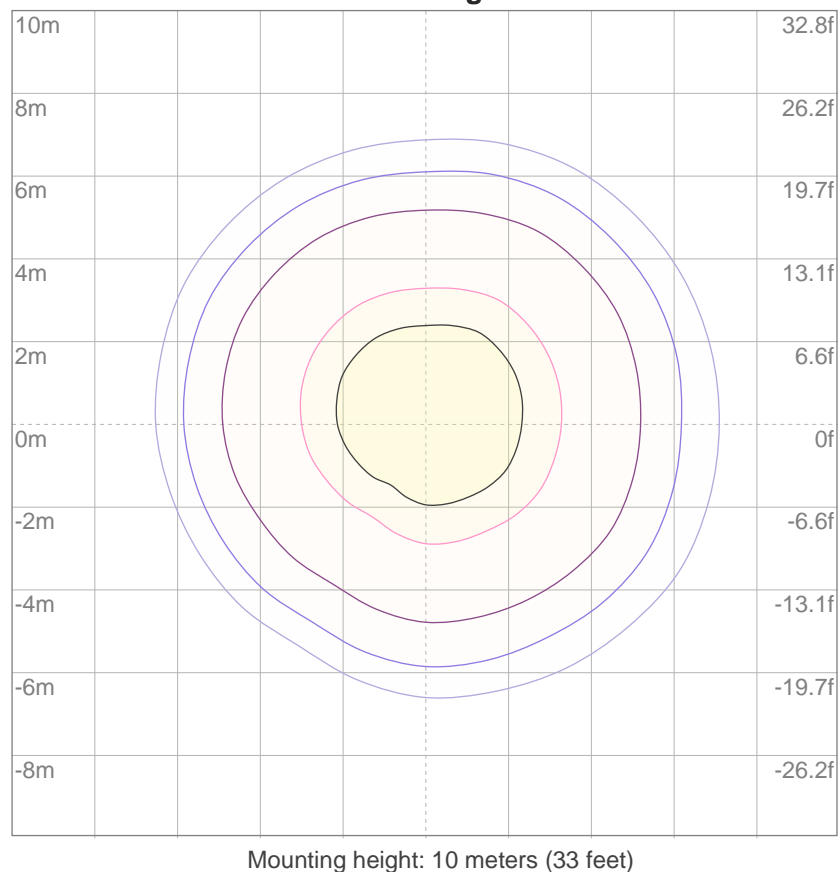**ISO lux diagram**


3%	1.92 lx
5%	3.20 lx
10%	6.40 lx
30%	19.2 lx
50%	32.0 lx

**Conditions:**


Number of c-planes: 12

Lux at center: 64.0 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

## Stabilization

Warmup curve

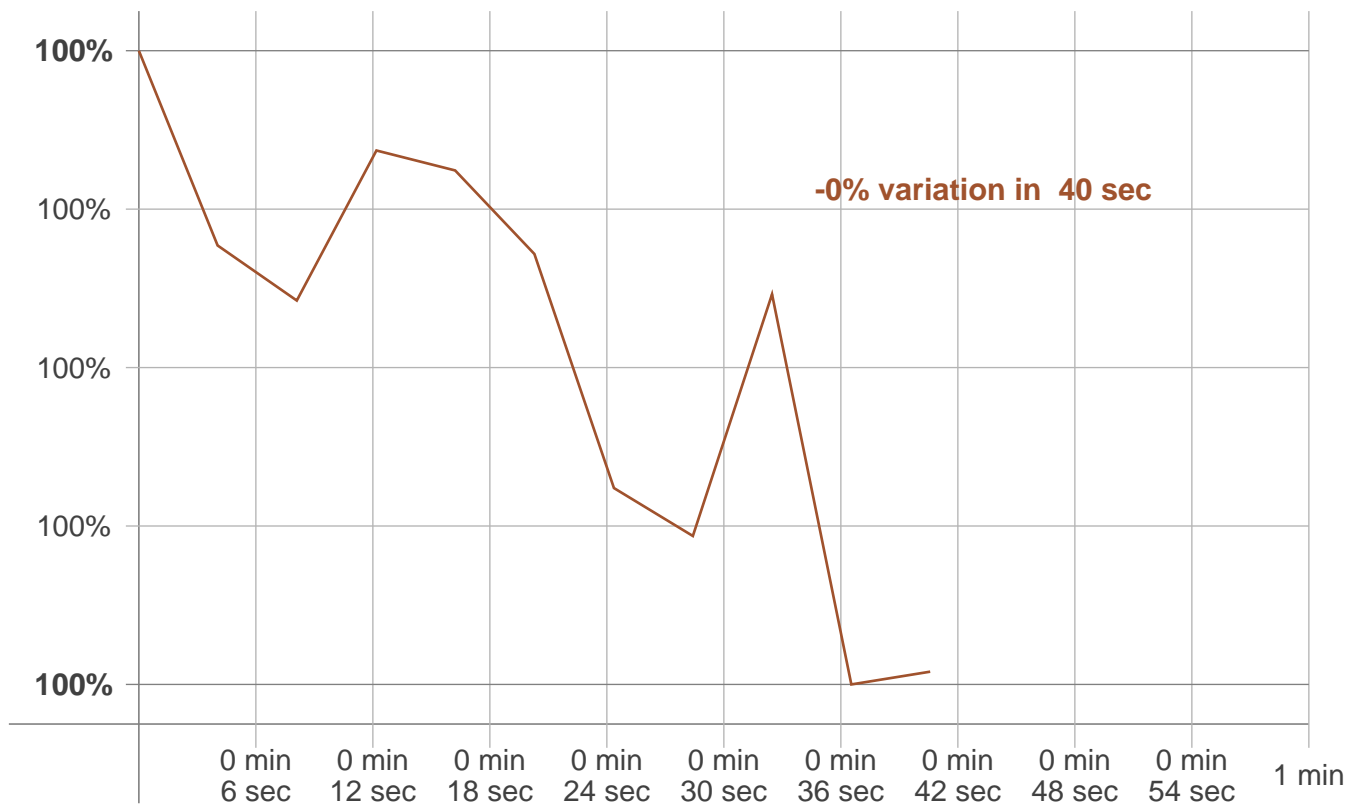

Warmup result

Warmup time:	Not completed
Warmup variation	0.0%

Warmup conditions

Stable period:	15 min
Stable change max:	0.5%
Minimum time:	30 min

Color temperature change

CCT start	CCT change	CCT end
3027 K	0 K	3027 K

Output change

Output start	Output change	Output end
1836 lm	1m	1835 lm