



REPORT

545 E. Algonquin Rd., Arlington Heights, IL 60005

Project No. G101518786

Date: September 19, 2014

REPORT NO. 101518786CHI-052D

TEST OF ONE LED RECESSED LUMINAIRE

MODEL NO. EMO11L-LO8302AN-B
LED MODEL NO. CITIZEN CLU024-1203B8-303M1A2
DRIVER MODEL NO. LTF DA15W300C2042BF-00HE

RENDERED TO

GENERATION BRANDS
7400 LINDER AVE
SKOKIE, IL 60077

TEST: Electrical and Photometric tests as required to the IESNA test standard.

STATEMENT OF LIMITATION: This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION: The testing performed was authorized by signed quote number 500506211.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

DESCRIPTION OF SAMPLE: The client submitted one production sample of model number EMO11L-LO8302AN-B. The sample was received by Intertek on July 29, 2014, in undamaged condition and one sample was tested as received. The sample designation was 07292014113320.

DATE OF TEST: September 19, 2014

SUMMARY

Model No.:	EMO11L-LO8302AN-B
Description:	LED Recessed Luminaire

Criteria	Result
Total Lumen Output (Lumens)	984.0
Total Power (W)	12.40
Luminaire Efficacy (LPW)	79.35
Power Factor	0.975

EQUIPMENT LIST

Equipment Used	Model Number	Control Number	Last Date Calibrated	Calibration Due Date
Yokogawa Power Meter	WT210	146919	07/16/14	07/16/15
Omega Newport Thermometer	DPI8-C24	146920	12/04/13	12/04/14
LSI High Speed Mirror Goniometer	6440T	146928	VBV	VBV
Newport Hygrometer	iServer	146956	01/02/14	01/02/15
Elgar, AC Power Supply	CW1251P	146918	VBV	VBV
Cole-Parmer Triple Timer	94440-00	CHI0041	04/01/14	04/01/15

TEST METHODS

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IESNA LM-79.

Photometric and Electrical Measurements – Distribution Method

A LSI Type C High Speed Model 6440 Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for each sample.

Ambient temperature was measured equal to the height of the sample mounted on the Goniometer equipment. Each sample was operated at input rated voltage in its designated orientation. Each sample was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Xitron or Yokogawa Power Analyzer.

Some graphics were created with Photometrics Plus software.


RESULTS OF TEST

Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
07292014113320	UP	120.0	105.9	12.40	0.975	984.0	79.35

Intensity (Candlepower) Summary at 25°C - Candelas

Angle	0	22.5	45	67.5	90
0	3210	3210	3210	3210	3210
5	2929	2924	2897	2857	2822
10	2118	2122	2098	2080	2046
15	1383	1380	1372	1355	1331
20	864	861	857	838	833
25	498	495	498	487	479
30	270	271	276	268	263
35	151	152	154	150	147
40	82	83	85	81	80
45	44	46	45	44	44
50	26	25	25	25	26
55	15	15	15	15	15
60	9	9	9	9	9
65	6	6	6	6	6
70	2	2	2	2	2
75	0	0	0	0	0
80	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

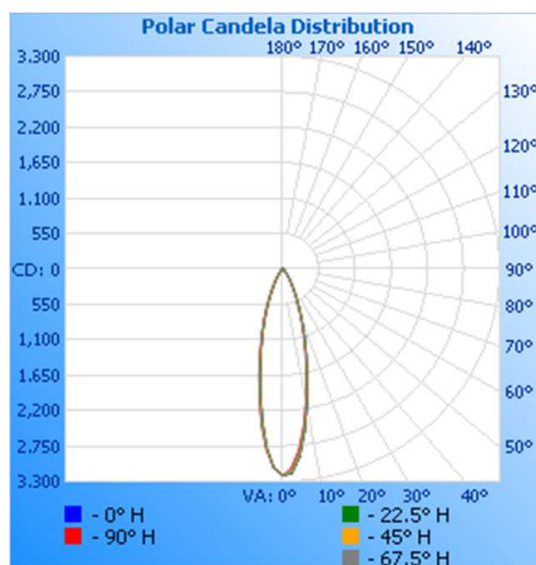

Spacing Criterion:

Spacing Criterion (0-180):	0.46
Spacing Criterion (90-270):	0.44
Spacing Criterion (Diagonal):	0.48

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20


RC	80	70	50	30	10	0
RW	70 50 30 10	70 50 30 10	50 30 10	50 30 10	50 30 10	0
0	119 119 119 119	116 116 116 116	111 111 111	106 106 106	102 102 102	100
1	114 112 110 108	112 110 108 106	106 104 103	102 101 100	99 98 97	95
2	110 105 102 99	108 104 101 98	101 98 96	98 96 94	95 93 92	90
3	105 100 96 92	103 98 95 91	96 93 90	94 91 89	91 89 87	86
4	101 95 90 87	99 94 89 86	92 88 85	90 87 84	88 85 83	82
5	97 90 85 82	96 89 85 81	88 84 81	86 83 80	85 82 79	78
6	94 86 81 78	92 85 81 77	84 80 77	83 79 76	81 78 76	75
7	90 82 77 74	89 82 77 74	81 76 73	80 76 73	78 75 73	71
8	87 79 74 71	86 79 74 71	78 73 70	77 73 70	76 72 70	69
9	84 76 71 68	83 76 71 68	75 70 67	74 70 67	73 70 67	66
10	81 73 68 65	80 73 68 65	72 68 65	71 67 65	71 67 65	64

RESULTS OF TEST (cont'd)


Illumination Plots

Mounting Height: 10 ft.

Illuminance - Cone of Light

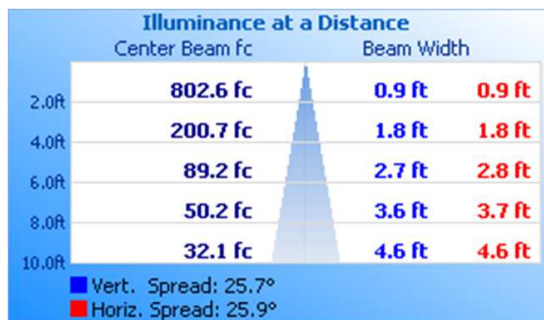

Isoillumination Plot

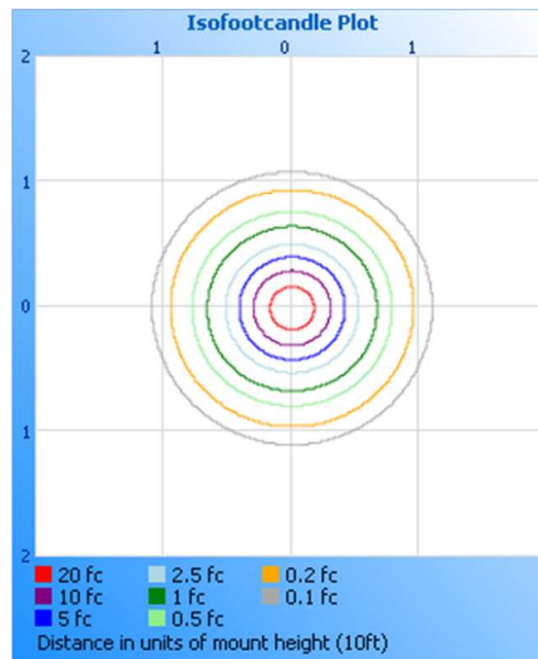



Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens	% Luminaire
0-30	834.9	84.8
0-40	928.8	94.4
0-60	978.2	99.4
60-90	5.8	0.6
0-90	984.0	100.0
90-180	0.0	0.0
0-180	984.0	100.0

Zonal Lumens and Percentages at 25°C

Zone	Lumens	% Luminaire
0-10	243.9	24.8
10-20	368.8	37.5
20-30	222.3	22.6
30-40	93.9	9.5
40-50	35.7	3.6
50-60	13.8	1.4
60-70	5.4	0.5
70-80	0.5	0.0
80-90	0.0	0.0

PICTURE (not to scale)

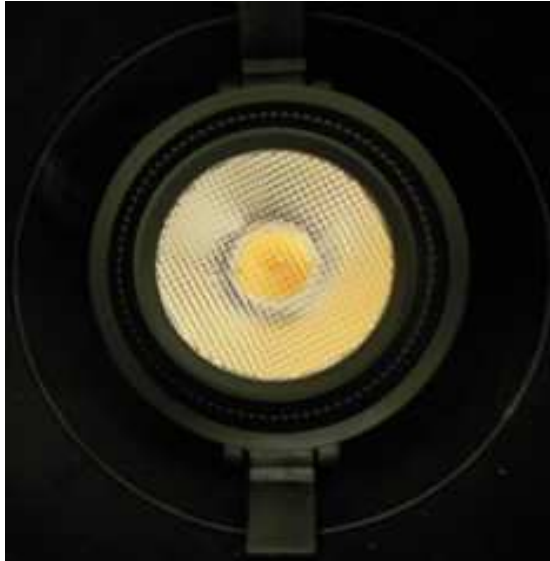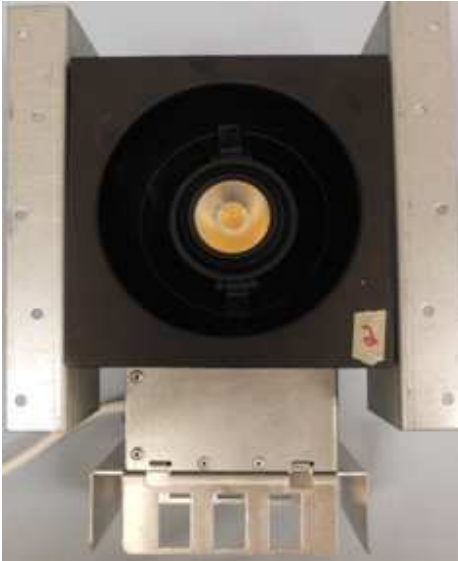

CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:



Kenneth Prettyman
Technician
Lighting Division

Attachment: None

Report Reviewed By:



Tim Quigley
Engineer
Lighting Division