

ELEMENT Merge 1.5 represents the marriage of a recessed linear LED system with a low-voltage track lighting system. Whether being used to highlight architectural elements, or deliver well-controlled general illumination, ELEMENT Merge 1.5 puts the focus on the room. Recessed lines of uniform, glare-free LED light can be designed to make 90° turns in the same plane or perpendicular transitions from ceiling to wall for enhanced architectural interest. Further, spot heads or pendants can be added directly into the channel at any point along its concealed low-voltage bus system for simultaneous accent or task illumination.

All ELEMENT Merge 1.5 components feature a beveled aperture to integrate seamlessly with architecture for sleek ceiling-to-fixture transitions. Available in 2', 4', 6' and 8' lengths (with a number of connector options) for flanged, flangeless, or lay-in installation.


- Low profile design for use in 2x4 construction
- 3-Step or better color binning
- Internal reflector finished with high-reflectance matte, white paint for even light distribution & optimal efficiency
- IC airtight rated (EM housing Non-IC)

## SPECIFICATIONS

DELIVERED LUMENS	700 lms/ft or 450 lms/ft
WATTS	12 watts/ft or 7 watts/ft
EFFICACY	58 l/w or 64 l/w (80CRI, 3500K)
CRI	80+, 90+
CCT OPTIONS	2700K, 3000K, 3500K or Warm Color Dimming (3000K-2000K)
VOLTAGE	120V or 277V (Concealed 10 gauge, low-voltage bus bar, order 12-volt remote transformer sold separately)
DIMMING	ELV, 0-10V, Lutron HI-Lume
TRANSITIONS	Optional Illuminated 90° horizontal turns (same plane) or 90° ceiling-to-wall transitions
CEILING APPEARANCE	Flangeless
CEILING APERTURE	1.5" beveled
HOUSING	IC Airtight available in 2', 4', 6' and 8'. IC suitable up to R60 spray foam insulation (Consult factory for Chicago Plenum). EM units available Non-IC only.
POWER SUPPLY**	Constant Current (Each linear channel includes a self-contained ELV, 0-10V, Lutron Hi-Lume 2 Wire PWM (120V only) or Lutron Hi-Lume, Eco System Fade-to-Black Driver, 0-10V 1%, 0-10V 0.1%
CONSTRUCTION	Housing: 20 gauge sheet metal Extrusion: Aluminum
FINISH	White Powder Coat
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2016 Title 24 Part 6 (Static White, 90 CRI versions).
LED LIFETIME	L70; 50,000 hours
WARRANTY*	5 years

\*Visit ELEMENT-lighting.com for specific warranty limitations and details.  
\*\*Consult Quotes Department for additional driver options.

Notes: Typical max run length is 80' for the channel; typical max run length is 40' for the low-voltage bus which can be powered from both sides for a total of 80'; system wattage will impact max run length

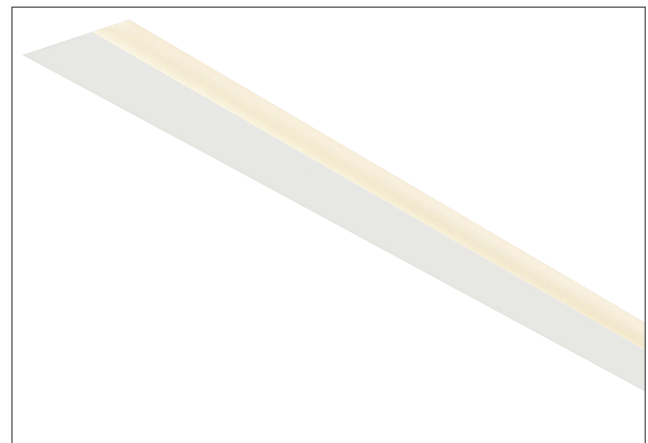

MERGE  
shown flangeless

## PERFORMANCE

### DOWNLIGHT (700 LPF)

LINEAR CHANNEL	FIXTURE OUTPUT (LMS)*	WATTAGE
2 FT	1400	24
4 FT	2800	48
6 FT	4200	72
8 FT	5600	96

\*REPRESENTS 3500K/80CRI

### DOWNLIGHT (450 LPF)

LINEAR CHANNEL	FIXTURE OUTPUT (LMS)*	WATTAGE
2 FT	900	14
4 FT	1800	28
6 FT	2700	42
8 FT	3600	56

\*REPRESENTS 3500K/80CRI


### Optional

- EM: integrated emergency battery back-up to provide illumination when main power is lost. EM battery is integrated in the Merge linear channel housing and provides 90 minutes of egress illumination. Each EM fixture ships with a test switch/indicator light.
  - 2' EM linear channel: 978 total lumens
  - 4', 6', & 8' EM linear channel: 1018 total lumens (illuminates 4' section of the 8' channel)

# MERGE™ 1.5

FLANGELESS RECESSED LINEAR CHANNELS

## HOUSING

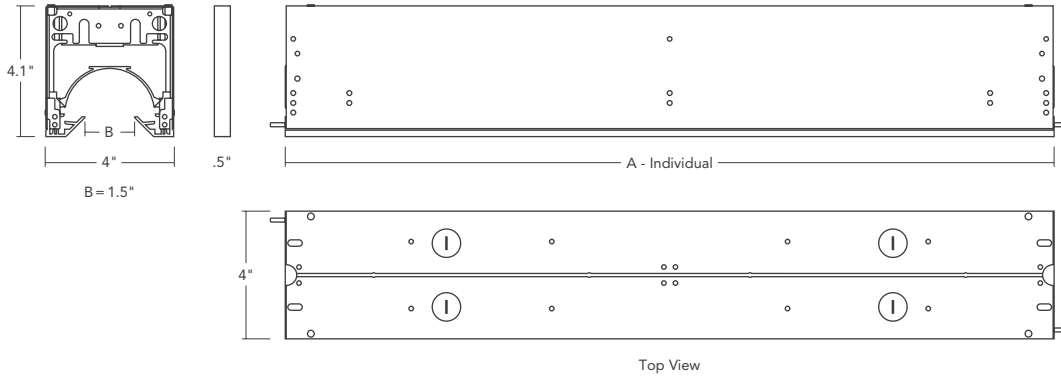

## DIMENSIONS

	LENGTH (A)
2' INDIVIDUAL	24"
4' INDIVIDUAL	48"
6' INDIVIDUAL	72"
8' INDIVIDUAL	96"

Please note that end caps will add 1" to overall length of the fixture



## PHOTOMETRICS: MERGE

DESCRIPTION: Merge LED 4' Linear Channel  
90 CRI, 3000K

MODEL: RLS14RLS930W

INPUT POWER (WATTS): 37.5

INPUT POWER FACTOR: 0.99

ABSOLUTE LUMINOUS FLUX (LUMENS): 1929

LUMEN EFFICACY (LUMENS PER WATT): 51.4

ANGLE	0°	45°	90°
0°	612	612	612
5°	598	609	626
10°	593	604	621
15°	584	595	612
20°	571	582	600
25°	554	566	583
30°	532	546	562
35°	506	522	537
40°	475	492	506
45°	442	458	469
50°	406	419	415
55°	364	375	352
60°	319	315	286
65°	269	249	196
70°	215	174	89
75°	159	78	29
80°	102	18	16
85°	50	8	8
90°	4	2	1

